


LEDLiner35

Suspended & Ceiling or Wall Mounted

Aluminium extruded profile 35x60 mm for ceiling, wall or suspended mounting solutions. Strong attention is given to thermal management (reduction of heat). LEDLiner35 offers the latest and best performing LED lighting technology using Philips LED modules.

Average weight of equipped profile:
1.60kg/m



Possibilities

Mounting:

- Suspended
- Ceiling mounted
- Wall mounted

Modules:

- Linear LED modules - Down

Options/Accessories

- Emergency lighting (1Hr/3Hrs)
- Actilume daylight/presence sensor

5 Years **Philips** Warranty

Index

Custom made:


Linear modules Down..... p.248

Ready to go:

Suspended..... p.189

Ceiling mounted..... p.190

Wall mounted..... p.191

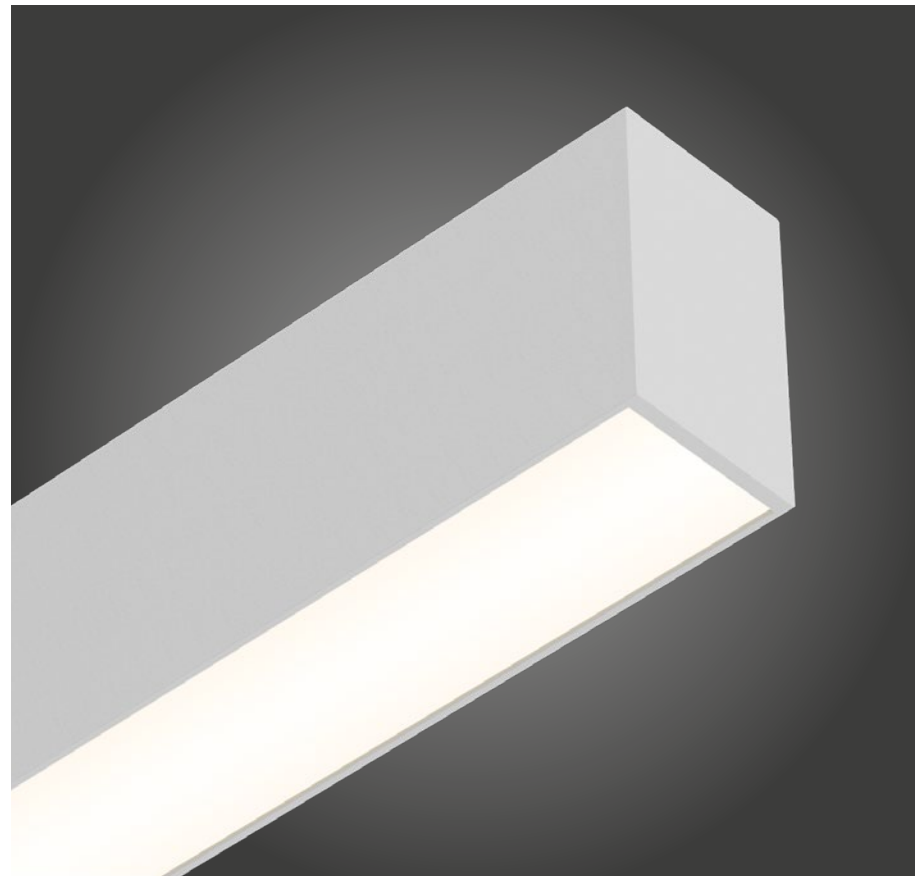


Available colors

01	03	18
White Matt Text.	Black Matt Text.	Grey Matt Text.
07	25	15
Anthracite Matt Text.	Smoked Brown	Corten
16	24	
Gold Matt	Old Matt Copper	

LEDLiner35 - Basic components

Profile housing




Profile /meter (max. length single piece 3400mm)

Matt White Texture	2104.00.01	
Matt Black Texture	2104.00.03	
Matt Anthracite Texture	2104.00.07	
Matt Grey 9006 Texture	2104.00.18	
Smoked Brown Texture	2104.00.25	
Gold Matt	2104.00.16	
Old Matt Copper	2104.00.24	
Corten	2104.00.15	
Other RAL Colors	650.99.00	on request



Connector


90°	2165.00.00
180°	2166.00.00
Custom made	2167.00.00



Screwless end cap

Matt White Texture	2170.00.01
Matt Black Texture	2170.00.03
Matt Anthracite Texture	2170.00.07
Matt Grey 9006 Texture	2170.00.18
Smoked Brown Texture	2170.00.25
Gold Matt	2170.00.16
Old Matt Copper	2170.00.24
Corten	2170.00.15


End caps require 15mm of space for each cap



LEDLiner35 Cover /meter


Opal	2200.00.00
Matt White Texture	2203.00.01
Matt Black Texture	2203.00.03
Matt Anthracite Texture	2203.00.07
Matt Grey 9006 Texture	2203.00.18
Smoked Brown Texture	2203.00.25
Gold Matt	2203.00.16
Old Matt Copper	2203.00.24
Corten	2203.00.15

Mounting



Wall connector 1pc/2000mm

Matt White Texture	2164.00.01
Matt Black Texture	2164.00.03
Matt Anthracite Texture	2164.00.07
Matt Grey 9006 Texture	2164.00.18
Smoked Brown Texture	2164.00.25
Gold Matt	2164.00.16
Old Matt Copper	2164.00.24
Corten	2164.00.15




Suspension Set (1 cable+bracket+ceiling fixation)
Incl ceiling fixation, min suspension height: 75mm

2000mm	2160.00.00
4000mm	2175.00.00

0-1800mm: 2 suspensions required
1801mm-3400mm: 3 suspensions required
3401mm-4200mm: 4 suspensions required
4201mm-6700mm: 6 suspensions required

Linear Modules



Linear Down
Philips Fortimo LED Module 1100lm/ft
See linear modules p.248-249

Available linear modules:
Ra80 - 3000K / 4000K
Ra90 - 2700K / 3000K / 4000K

Electrical



Ceiling Connecting Box Square 67x67x40mm*


Matt White Texture	2150.00.01
Matt Black Texture	2150.00.03
Matt Anthracite Texture	2150.00.07
Matt Grey 9006 Texture	2150.00.18
Smoked Brown Texture	2150.00.25
Gold Matt	2150.00.16
Old Matt Copper	2150.00.24
Corten	2150.00.15



Recessed Connecting Box Ø80mm*

Matt White Texture	2152.00.01
Matt Black Texture	2152.00.03
Matt Grey 9006 Texture	2152.00.18


Cut-out: Ø68mm (depth min. 60mm)
Other Colors on request
Detailed view: see p.279



Trimless Connecting Box Ø80mm*

Matt White Texture	2153.00.01
Matt Black Texture	2153.00.03
Matt Grey 9006 Texture	2153.00.18

Cut-out: Ø85mm (depth min. 60mm)
Other Colors on request
Detailed view: see p.279




White Textile Cable Supply

3x0.75mm ² - 2000mm	2154.00.01
3x0.75mm ² - 4000mm	2155.00.01
5x0.75mm ² - 2000mm	2156.00.01
5x0.75mm ² - 4000mm	2157.00.01
7x0.75mm ² - 2000mm	2158.00.01
7x0.75mm ² - 4000mm	2159.00.01



Black Textile Cable Supply

3x0.75mm ² - 2000mm	2154.00.03
3x0.75mm ² - 4000mm	2155.00.03
5x0.75mm ² - 2000mm	2156.00.03
5x0.75mm ² - 4000mm	2157.00.03
7x0.75mm ² - 2000mm	2158.00.03
7x0.75mm ² - 4000mm	2159.00.03




Grey Textile Cable Supply

3x0.75mm ² - 2000mm	2154.00.18
3x0.75mm ² - 4000mm	2155.00.18
5x0.75mm ² - 2000mm	2156.00.18
5x0.75mm ² - 4000mm	2157.00.18
7x0.75mm ² - 2000mm	2158.00.18
7x0.75mm ² - 4000mm	2159.00.18

*Cable supply shown in photo not included

Linear Modules: LEDLiner Down

Philips Fortimo LED Module 1100lm/ft*



Module availability:

- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed


		2700K - Ra90 Opal diffuser		3000K - Ra80 Opal diffuser		4000K - Ra80 Opal diffuser		2700K - Ra90 Prismatic diffuser		3000K - Ra80 Prismatic diffuser		4000K - Ra80 Prismatic diffuser	
3300lm 844mm	Non dimmable	18.6W	2220.24.927.3300	2220.24.830.3300	2220.24.840.3300	2220.24.927.3300.P	2220.24.830.3300.P	2220.24.840.3300.P					
	1-10V dimmable	18.6W	2220.25.927.3300	2220.25.830.3300	2220.25.840.3300	2220.25.927.3300.P	2220.25.830.3300.P	2220.25.840.3300.P					
	Touch/DALI dim.	18.6W	2220.26.927.3300	2220.26.830.3300	2220.26.840.3300	2220.26.927.3300.P	2220.26.830.3300.P	2220.26.840.3300.P					
3850lm 986mm	Non dimmable	21.7W	Not available	2220.24.830.3850	2220.24.840.3850	Not available	2220.24.830.3850.P	2220.24.840.3850.P					
	1-10V dimmable	21.7W	Not available	2220.25.830.3850	2220.25.840.3850	Not available	2220.25.830.3850.P	2220.25.840.3850.P					
	Touch/DALI dim.	21.7W	Not available	2220.26.830.3850	2220.26.840.3850	Not available	2220.26.830.3850.P	2220.26.840.3850.P					
4400lm 1124mm	Non dimmable	24.8W	2220.24.927.4400	2220.24.830.4400	2220.24.840.4400	2220.24.927.4400.P	2220.24.830.4400.P	2220.24.840.4400.P					
	1-10V dimmable	24.8W	2220.25.927.4400	2220.25.830.4400	2220.25.840.4400	2220.25.927.4400.P	2220.25.830.4400.P	2220.25.840.4400.P					
	Touch/DALI dim.	24.8W	2220.26.927.4400	2220.26.830.4400	2220.26.840.4400	2220.26.927.4400.P	2220.26.830.4400.P	2220.26.840.4400.P					
4950lm 1266mm	Non dimmable	27.9W	Not available	2220.24.830.4950	2220.24.840.4950	Not available	2220.24.830.4950.P	2220.24.840.4950.P					
	1-10V dimmable	27.9W	Not available	2220.25.830.4950	2220.25.840.4950	Not available	2220.25.830.4950.P	2220.25.840.4950.P					
	Touch/DALI dim.	27.9W	Not available	2220.26.830.4950	2220.26.840.4950	Not available	2220.26.830.4950.P	2220.26.840.4950.P					
5500lm 1406mm	Non dimmable	31W	2220.24.927.5500	2220.24.830.5500	2220.24.840.5500	2220.24.927.5500.P	2220.24.830.5500.P	2220.24.840.5500.P					
	1-10V dimmable	31W	2220.25.927.5500	2220.25.830.5500	2220.25.840.5500	2220.25.927.5500.P	2220.25.830.5500.P	2220.25.840.5500.P					
	Touch/DALI dim.	31W	2220.26.927.5500	2220.26.830.5500	2220.26.840.5500	2220.26.927.5500.P	2220.26.830.5500.P	2220.26.840.5500.P					
6050lm 1548mm	Non dimmable	34.1W	Not available	2220.24.830.6050	2220.24.840.6050	Not available	2220.24.830.6050.P	2220.24.840.6050.P					
	1-10V dimmable	34.1W	Not available	2220.25.830.6050	2220.25.840.6050	Not available	2220.25.830.6050.P	2220.25.840.6050.P					
	Touch/DALI dim.	34.1W	Not available	2220.26.830.6050	2220.26.840.6050	Not available	2220.26.830.6050.P	2220.26.840.6050.P					
6600lm 1686mm	Non dimmable	37.2W	2220.24.927.6600	2220.24.830.6600	2220.24.840.6600	2220.24.927.6600.P	2220.24.830.6600.P	2220.24.840.6600.P					
	1-10V dimmable	37.2W	2220.25.927.6600	2220.25.830.6600	2220.25.840.6600	2220.25.927.6600.P	2220.25.830.6600.P	2220.25.840.6600.P					
	Touch/DALI dim.	37.2W	2220.26.927.6600	2220.26.830.6600	2220.26.840.6600	2220.26.927.6600.P	2220.26.830.6600.P	2220.26.840.6600.P					
7150lm 1828mm	Non dimmable	40.3W	Not available	2220.24.830.7150	2220.24.840.7150	Not available	2220.24.830.7150.P	2220.24.840.7150.P					
	1-10V dimmable	40.3W	Not available	2220.25.830.7150	2220.25.840.7150	Not available	2220.25.830.7150.P	2220.25.840.7150.P					
	Touch/DALI dim.	40.3W	Not available	2220.26.830.7150	2220.26.840.7150	Not available	2220.26.830.7150.P	2220.26.840.7150.P					
7700lm 1968mm	Non dimmable	43.4W	2220.24.927.7700	2220.24.830.7700	2220.24.840.7700	2220.24.927.7700.P	2220.24.830.7700.P	2220.24.840.7700.P					
	1-10V dimmable	43.4W	2220.25.927.7700	2220.25.830.7700	2220.25.840.7700	2220.25.927.7700.P	2220.25.830.7700.P	2220.25.840.7700.P					
	Touch/DALI dim.	43.4W	2220.26.927.7700	2220.26.830.7700	2220.26.840.7700	2220.26.927.7700.P	2220.26.830.7700.P	2220.26.840.7700.P					
8250lm 2110mm	Non dimmable	46.5W	Not available	2220.24.830.8250	2220.24.840.8250	Not available	2220.24.830.8250.P	2220.24.840.8250.P					
	1-10V dimmable	46.5W	Not available	2220.25.830.8250	2220.25.840.8250	Not available	2220.25.830.8250.P	2220.25.840.8250.P					
	Touch/DALI dim.	46.5W	Not available	2220.26.830.8250	2220.26.840.8250	Not available	2220.26.830.8250.P	2220.26.840.8250.P					

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

* The luminous flux given on this page refers to module in 4000K - Ra80.
For exact specifications see table on page 262

Linear Modules: LEDLiner Down

Philips Fortimo LED Module 1100lm/ft*



Module availability: -LEDLiner35
 -LEDLiner47
 -LEDLiner65
 -LEDLiner66
 -LEDLiner85
 -LEDLiner170
 -LEDLiner40 Trimless
 -LEDLiner40 Recessed
 -LEDLiner45 Recessed
 -LEDLiner65 Recessed
 -LEDLiner100 Trimless
 -LEDLiner100 Recessed

			2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser	3000K - Ra80 Prismatic diffuser	4000K - Ra80 Prismatic diffuser
8800lm 2248mm	Non dimmable	49.6W	2220.24.927.8800	2220.24.830.8800	2220.24.840.8800	2220.24.927.8800.P	2220.24.830.8800.P	2220.24.840.8800.P
	1-10V dimmable	49.6W	2220.25.927.8800	2220.25.830.8800	2220.25.840.8800	2220.25.927.8800.P	2220.25.830.8800.P	2220.25.840.8800.P
	Touch/DALI dim.	49.6W	2220.26.927.8800	2220.26.830.8800	2220.26.840.8800	2220.26.927.8800.P	2220.26.830.8800.P	2220.26.840.8800.P
9350lm 2390mm	Non dimmable	52.7W	Not available	2220.24.830.9350	2220.24.840.9350	Not available	2220.24.830.9350.P	2220.24.840.9350.P
	1-10V dimmable	52.7W	Not available	2220.25.830.9350	2220.25.840.9350	Not available	2220.25.830.9350.P	2220.25.840.9350.P
	Touch/DALI dim.	52.7W	Not available	2220.26.830.9350	2220.26.840.9350	Not available	2220.26.830.9350.P	2220.26.840.9350.P
9900lm 2530mm	Non dimmable	55.8W	2220.24.927.9900	2220.24.830.9900	2220.24.840.9900	2220.24.927.9900.P	2220.24.830.9900.P	2220.24.840.9900.P
	1-10V dimmable	55.8W	2220.25.927.9900	2220.25.830.9900	2220.25.840.9900	2220.25.927.9900.P	2220.25.830.9900.P	2220.25.840.9900.P
	Touch/DALI dim.	55.8W	2220.26.927.9900	2220.26.830.9900	2220.26.840.9900	2220.26.927.9900.P	2220.26.830.9900.P	2220.26.840.9900.P
10450lm 2672mm	Non dimmable	58.9W	Not available	2220.24.830.10450	2220.24.840.10450	Not available	2220.24.830.10450.P	2220.24.840.10450.P
	1-10V dimmable	58.9W	Not available	2220.25.830.10450	2220.25.840.10450	Not available	2220.25.830.10450.P	2220.25.840.10450.P
	Touch/DALI dim.	58.9W	Not available	2220.26.830.10450	2220.26.840.10450	Not available	2220.26.830.10450.P	2220.26.840.10450.P
11000lm 2810mm	Non dimmable	62W	2220.24.927.11000	2220.24.830.11000	2220.24.840.11000	2220.24.927.11000.P	2220.24.830.11000.P	2220.24.840.11000.P
	1-10V dimmable	62W	2220.25.927.11000	2220.25.830.11000	2220.25.840.11000	2220.25.927.11000.P	2220.25.830.11000.P	2220.25.840.11000.P
	Touch/DALI dim.	62W	2220.26.927.11000	2220.26.830.11000	2220.26.840.11000	2220.26.927.11000.P	2220.26.830.11000.P	2220.26.840.11000.P
11550lm 2952mm	Non dimmable	65.1W	Not available	2220.24.830.11550	2220.24.840.11550	Not available	2220.24.830.11550.P	2220.24.840.11550.P
	1-10V dimmable	65.1W	Not available	2220.25.830.11550	2220.25.840.11550	Not available	2220.25.830.11550.P	2220.25.840.11550.P
	Touch/DALI dim.	65.1W	Not available	2220.26.830.11550	2220.26.840.11550	Not available	2220.26.830.11550.P	2220.26.840.11550.P
12100lm 3092mm	Non dimmable	68.2W	2220.24.927.12100	2220.24.830.12100	2220.24.840.12100	2220.24.927.12100.P	2220.24.830.12100.P	2220.24.840.12100.P
	1-10V dimmable	68.2W	2220.25.927.12100	2220.25.830.12100	2220.25.840.12100	2220.25.927.12100.P	2220.25.830.12100.P	2220.25.840.12100.P
	Touch/DALI dim.	68.2W	2220.26.927.12100	2220.26.830.12100	2220.26.840.12100	2220.26.927.12100.P	2220.26.830.12100.P	2220.26.840.12100.P
12650lm 3234mm	Non dimmable	71.3W	Not available	2220.24.830.12650	2220.24.840.12650	Not available	2220.24.830.12650.P	2220.24.840.12650.P
	1-10V dimmable	71.3W	Not available	2220.25.830.12650	2220.25.840.12650	Not available	2220.25.830.12650.P	2220.25.840.12650.P
	Touch/DALI dim.	71.3W	Not available	2220.26.830.12650	2220.26.840.12650	Not available	2220.26.830.12650.P	2220.26.840.12650.P
13200lm 3372mm	Non dimmable	74.4W	2220.24.927.13200	2220.24.830.13200	2220.24.840.13200	2220.24.927.13200.P	2220.24.830.13200.P	2220.24.840.13200.P
	1-10V dimmable	74.4W	2220.25.927.13200	2220.25.830.13200	2220.25.840.13200	2220.25.927.13200.P	2220.25.830.13200.P	2220.25.840.13200.P
	Touch/DALI dim.	74.4W	2220.26.927.13200	2220.26.830.13200	2220.26.840.13200	2220.26.927.13200.P	2220.26.830.13200.P	2220.26.840.13200.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170