


LEDLiner65

Suspended & Ceiling Mounted

Square aluminium extruded profile 65x72mm for ceiling or suspended mounting solutions. Strong attention is given to thermal management (reduction of heat), equal light distribution and glare reduction (Prismatic Optics). LEDLiner65 offers the latest and best performing LED lighting technology using Philips LED Lines.

Average weight of equipped profile:
3.30kg/m



Possibilities

Mounting:

- Suspended
- Ceiling mounted

Modules:

- Linear LED modules - Down
- Juno Module
- Titan Module

Options/Accessories

- Prismatic cover (glare reduction)
- Emergency lighting (1Hr/3Hrs)
- Actilume daylight/presence sensor

5 Years **Philips** Warranty

Index

Custom made:

Linear modules Down..... p.248

Ready to go:


Suspended..... p.208

Ceiling Mounted..... p.209




Optional:
IP65 Compound

More info on p.206

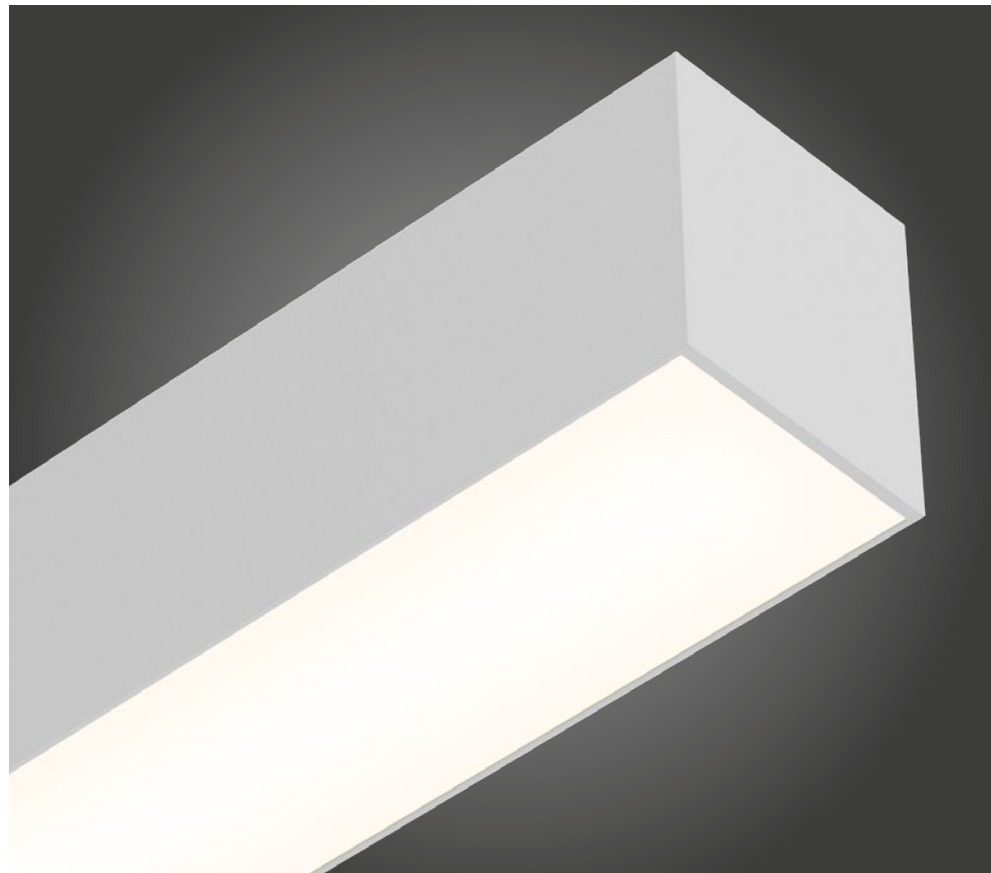

Available colors


| | | |
|-----------------------|------------------|-----------------|
| 01 | 03 | 18 |
| White Matt Text. | Black Matt Text. | Grey Matt Text. |
| 07 | 25 | 15 |
| Anthracite Matt Text. | Smoked Brown | Corten |
| 16 | 24 | |
| Gold Matt | Old Matt Copper | |



Available with opal or prismatic cover.

LEDLiner65 - Basic components

Profile housing




| | | |
|---|------------|------------|
| Profile /meter (max. length single piece 3400mm) | | |
| Matt White Texture | 2102.00.01 | |
| Matt Black Texture | 2102.00.03 | |
| Matt Anthracite Texture | 2102.00.07 | |
| Matt Grey 9006 Texture | 2102.00.18 | |
| Smoked Brown Texture | 2102.00.25 | |
| Gold Matt | 2102.00.16 | |
| Old Matt Copper | 2102.00.24 | |
| Corten | 2102.00.15 | |
| Other RAL Colors | 650.99.00 | on request |



| | | |
|---------------------|------------|--|
| Connector 65 | | |
| 90° | 2176.00.00 | |
| 180° | 2177.00.00 | |
| "T" | 2148.00.00 | |
| Custom made | 2178.00.00 | |




| | | |
|---|------------|--|
| End Cap without visible screws (1 piece) | | |
| Aluminium Anodised | 2172.00.10 | |
| Matt White | 2172.00.01 | |
| Matt Black | 2172.00.03 | |
| Matt Grey 9006 | 2172.00.18 | |
| Matt Anthracite | 2172.00.07 | |
| Smoked Brown | 2172.00.25 | |
| Gold Matt | 2172.00.16 | |
| Old Matt Copper | 2172.00.24 | |
| Corten | 2172.00.15 | |




| | | |
|--------------------------------|------------|--|
| LEDLiner65 Cover /meter | | |
| Opal cover | 2202.00.00 | |
| Prismatic cover | 2203.00.00 | |
| Matt White | 2205.00.01 | |
| Matt Black | 2205.00.03 | |
| Matt Anthracite | 2205.00.07 | |
| Matt Grey 9006 | 2205.00.18 | |
| Smoked Brown Text. | 2205.00.25 | |
| Gold Matt | 2205.00.16 | |
| Old Matt Copper | 2205.00.24 | |
| Corten | 2205.00.15 | |

Mounting



| | | |
|---|------------|--|
| Suspension Set | | |
| Incl ceiling fixation, min suspension height: 75mm | | |
| 2000mm | 2162.00.00 | |
| 4000mm | 2169.00.00 | |
| 0-1800mm: 2 suspensions required | | |
| 1801mm-3400mm: 3 suspensions required | | |
| 3401mm-4200mm: 4 suspensions required | | |
| 4201mm-6700mm: 6 suspensions required | | |
| Bracket comes in the same color as the profile | | |


Linear Modules



| | |
|--------------------------------------|--|
| Linear Down / Up&Down | |
| Philips Fortimo LED Module 1100lm/ft | |
| Down p.248-249 | |
| Up&Down Single Circuit see p.250-251 | |
| Up&Down Double Circuit see p.252-253 | |
| Available linear modules: | |
| Ra80 - 3000K / 4000K | |
| Ra90 - 2700K / 3000K / 4000K | |

*Cable supply shown in photo not included

Electrical




| | |
|---|-----------|
| Extra circuit | |
| Per meter | |
| Extra circuit /m | 650.00.00 |
| When multiple modules are used in one profile, modules can be switched individually using multiple circuits. Length of extra circuit equals the full length of the profile. | |



| | |
|--|------------|
| Ceiling Connecting Box Square 67x67x40mm* | |
| Matt White Texture | 2150.00.01 |
| Matt Black Texture | 2150.00.03 |
| Matt Anthracite Texture | 2150.00.07 |
| Matt Grey 9006 Texture | 2150.00.18 |
| Smoked Brown Texture | 2150.00.25 |
| Gold Matt | 2150.00.16 |
| Old Matt Copper | 2150.00.24 |
| Corten | 2150.00.15 |



| | |
|---------------------------------------|------------|
| Recessed Connecting Box Ø80mm* | |
| Matt White Texture | 2152.00.01 |
| Matt Black Texture | 2152.00.03 |
| Matt Grey 9006 Texture | 2152.00.18 |
| Cut-out: Ø68mm (depth min. 60mm) | |
| Other Colors on request | |
| Detailed view: see p.279 | |




| | |
|---------------------------------------|------------|
| Trimless Connecting Box Ø80mm* | |
| Matt White Texture | 2153.00.01 |
| Matt Black Texture | 2153.00.03 |
| Matt Grey 9006 Texture | 2153.00.18 |
| Cut-out: Ø85mm (depth min. 60mm) | |
| Other Colors on request | |
| Detailed view: see p.279 | |



| | |
|-----------------------------------|------------|
| White Textile Cable Supply | |
| 3x0.75mm ² - 2000mm | 2154.00.01 |
| 3x0.75mm ² - 4000mm | 2155.00.01 |
| 5x0.75mm ² - 2000mm | 2156.00.01 |
| 5x0.75mm ² - 4000mm | 2157.00.01 |
| 7x0.75mm ² - 2000mm | 2158.00.01 |
| 7x0.75mm ² - 4000mm | 2159.00.01 |



| | |
|-----------------------------------|------------|
| Black Textile Cable Supply | |
| 3x0.75mm ² - 2000mm | 2154.00.03 |
| 3x0.75mm ² - 4000mm | 2155.00.03 |
| 5x0.75mm ² - 2000mm | 2156.00.03 |
| 5x0.75mm ² - 4000mm | 2157.00.03 |
| 7x0.75mm ² - 2000mm | 2158.00.03 |
| 7x0.75mm ² - 4000mm | 2159.00.03 |



| | |
|----------------------------------|------------|
| Grey Textile Cable Supply | |
| 3x0.75mm ² - 2000mm | 2154.00.18 |
| 3x0.75mm ² - 4000mm | 2155.00.18 |
| 5x0.75mm ² - 2000mm | 2156.00.18 |
| 5x0.75mm ² - 4000mm | 2157.00.18 |
| 7x0.75mm ² - 2000mm | 2158.00.18 |
| 7x0.75mm ² - 4000mm | 2159.00.18 |

LEDLiner65 - Optional modules



Emergency module for linear modules
 1Hr Standard 659.24.LED-1
 3Hrs Standard 659.24.LED-3
 1Hr DALI 659.26.LED-1
 3Hrs DALI 659.26.LED-3
 Emergency modules are equipped with self-testing.
 DALI version with on command testing, status read-out
 and additional functionality.

More info see p.271



Actilume daylight/presence detection
 Actilume system 659.00.00
 1 sensor integrated in 1 fixture

Optional: IP65-Compound



Silicone compound for linear modules
 IP65 Compound (min. 5 meter) 2209.00.00

DOXIS offers IP65 ratings on its LEDLiner65 profiles, using clear silicone compound added on the surface of the LED modules and drivers.

Important note: Using silicone compound increases the CCT (color temperature) resulting in colder white light.

More info on next page.

LEDLiner65 - Spot modules

Juno

Orientable spot module (driver included)



| | | |
|----------------------|-----------------------|------------------------|
| 44° Reflector | 2700K - 380lm | 2212.24.927. XX |
| | Non dim 3000K - 400lm | 2212.24.930. XX |
| | Ra90 4000K - 409lm | 2212.24.940. XX |



| | | |
|------------------|-----------------------|------------------------|
| Soft Beam | 2700K - 380lm | 2213.24.927. XX |
| | Non dim 3000K - 400lm | 2213.24.930. XX |
| | Ra90 4000K - 409lm | 2213.24.940. XX |

Module length



Colors

| | | |
|-------------------------------|-----------|----------|
| Matt White Texture | 01 | standard |
| Matt Black Texture | 03 | standard |
| Matt Anthracite Texture | 07 | standard |
| Matt Grey 9006Texture | 18 | standard |
| Smoked Brown Texture | 25 | |
| Gold Matt | 16 | |
| Old Matt Copper | 24 | |
| Corten | 15 | |
| Other RAL colors on request | | |

Titan

Orientable spot module (driver included)



| | | |
|--------------|----------|---------------------------|
| | | 836lm - 8.9W |
| 2700K | Non dim. | 2208.24.927. AA.XX |
| | Ra90 | |

| | | |
|--------------|----------|---------------------------|
| | | 867lm - 8.9W |
| 3000K | Non dim. | 2208.24.930. AA.XX |
| | Ra90 | |

| | | |
|--------------|----------|---------------------------|
| | | 886lm - 8.9W |
| 4000K | Non dim. | 2208.24.940. AA.XX |
| | Ra90 | |


28° Reflector: 0000.00.000.**28.00**
 40° Reflector: 0000.00.000.**40.00**

Module length



Colors

| | | |
|-------------------------------|-----------|----------|
| Matt White Texture | 01 | standard |
| Matt Black Texture | 03 | standard |
| Matt Anthracite Texture | 07 | standard |
| Matt Grey 9006Texture | 18 | standard |
| Smoked Brown Texture | 25 | |
| Gold Matt | 16 | |
| Old Matt Copper | 24 | |
| Corten | 15 | |
| Other RAL colors on request | | |

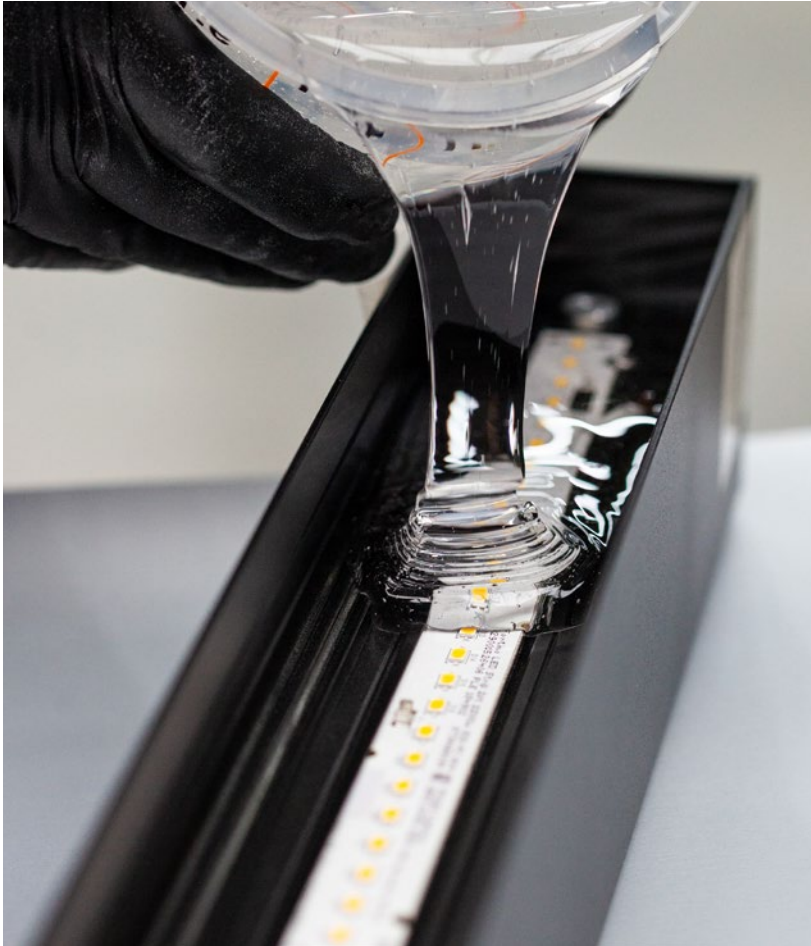


After mounting LED boards into aluminium profiles, a two component, optically clear High Strength Silicone Elastomer is used for IP65 protection.



An anthracite grey two component silicone elastomer is used to protect all electronic components, by filling the custom designed driver housing.

Linear Modules: LEDLiner Down

Philips Fortimo LED Module 1100lm/ft*



Module availability:

- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed


| | | | 2700K - Ra90 Opal diffuser | 3000K - Ra80 Opal diffuser | 4000K - Ra80 Opal diffuser | 2700K - Ra90 Prismatic diffuser | 3000K - Ra80 Prismatic diffuser | 4000K - Ra80 Prismatic diffuser |
|-------------------------|-----------------|-------|-------------------------------|-------------------------------|-------------------------------|------------------------------------|------------------------------------|------------------------------------|
| 3300lm 844mm | Non dimmable | 18.6W | 2220.24.927.3300 | 2220.24.830.3300 | 2220.24.840.3300 | 2220.24.927.3300.P | 2220.24.830.3300.P | 2220.24.840.3300.P |
| | 1-10V dimmable | 18.6W | 2220.25.927.3300 | 2220.25.830.3300 | 2220.25.840.3300 | 2220.25.927.3300.P | 2220.25.830.3300.P | 2220.25.840.3300.P |
| | Touch/DALI dim. | 18.6W | 2220.26.927.3300 | 2220.26.830.3300 | 2220.26.840.3300 | 2220.26.927.3300.P | 2220.26.830.3300.P | 2220.26.840.3300.P |
| 3850lm 986mm | Non dimmable | 21.7W | Not available | 2220.24.830.3850 | 2220.24.840.3850 | Not available | 2220.24.830.3850.P | 2220.24.840.3850.P |
| | 1-10V dimmable | 21.7W | Not available | 2220.25.830.3850 | 2220.25.840.3850 | Not available | 2220.25.830.3850.P | 2220.25.840.3850.P |
| | Touch/DALI dim. | 21.7W | Not available | 2220.26.830.3850 | 2220.26.840.3850 | Not available | 2220.26.830.3850.P | 2220.26.840.3850.P |
| 4400lm 1124mm | Non dimmable | 24.8W | 2220.24.927.4400 | 2220.24.830.4400 | 2220.24.840.4400 | 2220.24.927.4400.P | 2220.24.830.4400.P | 2220.24.840.4400.P |
| | 1-10V dimmable | 24.8W | 2220.25.927.4400 | 2220.25.830.4400 | 2220.25.840.4400 | 2220.25.927.4400.P | 2220.25.830.4400.P | 2220.25.840.4400.P |
| | Touch/DALI dim. | 24.8W | 2220.26.927.4400 | 2220.26.830.4400 | 2220.26.840.4400 | 2220.26.927.4400.P | 2220.26.830.4400.P | 2220.26.840.4400.P |
| 4950lm 1266mm | Non dimmable | 27.9W | Not available | 2220.24.830.4950 | 2220.24.840.4950 | Not available | 2220.24.830.4950.P | 2220.24.840.4950.P |
| | 1-10V dimmable | 27.9W | Not available | 2220.25.830.4950 | 2220.25.840.4950 | Not available | 2220.25.830.4950.P | 2220.25.840.4950.P |
| | Touch/DALI dim. | 27.9W | Not available | 2220.26.830.4950 | 2220.26.840.4950 | Not available | 2220.26.830.4950.P | 2220.26.840.4950.P |
| 5500lm 1406mm | Non dimmable | 31W | 2220.24.927.5500 | 2220.24.830.5500 | 2220.24.840.5500 | 2220.24.927.5500.P | 2220.24.830.5500.P | 2220.24.840.5500.P |
| | 1-10V dimmable | 31W | 2220.25.927.5500 | 2220.25.830.5500 | 2220.25.840.5500 | 2220.25.927.5500.P | 2220.25.830.5500.P | 2220.25.840.5500.P |
| | Touch/DALI dim. | 31W | 2220.26.927.5500 | 2220.26.830.5500 | 2220.26.840.5500 | 2220.26.927.5500.P | 2220.26.830.5500.P | 2220.26.840.5500.P |
| 6050lm 1548mm | Non dimmable | 34.1W | Not available | 2220.24.830.6050 | 2220.24.840.6050 | Not available | 2220.24.830.6050.P | 2220.24.840.6050.P |
| | 1-10V dimmable | 34.1W | Not available | 2220.25.830.6050 | 2220.25.840.6050 | Not available | 2220.25.830.6050.P | 2220.25.840.6050.P |
| | Touch/DALI dim. | 34.1W | Not available | 2220.26.830.6050 | 2220.26.840.6050 | Not available | 2220.26.830.6050.P | 2220.26.840.6050.P |
| 6600lm 1686mm | Non dimmable | 37.2W | 2220.24.927.6600 | 2220.24.830.6600 | 2220.24.840.6600 | 2220.24.927.6600.P | 2220.24.830.6600.P | 2220.24.840.6600.P |
| | 1-10V dimmable | 37.2W | 2220.25.927.6600 | 2220.25.830.6600 | 2220.25.840.6600 | 2220.25.927.6600.P | 2220.25.830.6600.P | 2220.25.840.6600.P |
| | Touch/DALI dim. | 37.2W | 2220.26.927.6600 | 2220.26.830.6600 | 2220.26.840.6600 | 2220.26.927.6600.P | 2220.26.830.6600.P | 2220.26.840.6600.P |
| 7150lm 1828mm | Non dimmable | 40.3W | Not available | 2220.24.830.7150 | 2220.24.840.7150 | Not available | 2220.24.830.7150.P | 2220.24.840.7150.P |
| | 1-10V dimmable | 40.3W | Not available | 2220.25.830.7150 | 2220.25.840.7150 | Not available | 2220.25.830.7150.P | 2220.25.840.7150.P |
| | Touch/DALI dim. | 40.3W | Not available | 2220.26.830.7150 | 2220.26.840.7150 | Not available | 2220.26.830.7150.P | 2220.26.840.7150.P |
| 7700lm 1968mm | Non dimmable | 43.4W | 2220.24.927.7700 | 2220.24.830.7700 | 2220.24.840.7700 | 2220.24.927.7700.P | 2220.24.830.7700.P | 2220.24.840.7700.P |
| | 1-10V dimmable | 43.4W | 2220.25.927.7700 | 2220.25.830.7700 | 2220.25.840.7700 | 2220.25.927.7700.P | 2220.25.830.7700.P | 2220.25.840.7700.P |
| | Touch/DALI dim. | 43.4W | 2220.26.927.7700 | 2220.26.830.7700 | 2220.26.840.7700 | 2220.26.927.7700.P | 2220.26.830.7700.P | 2220.26.840.7700.P |
| 8250lm 2110mm | Non dimmable | 46.5W | Not available | 2220.24.830.8250 | 2220.24.840.8250 | Not available | 2220.24.830.8250.P | 2220.24.840.8250.P |
| | 1-10V dimmable | 46.5W | Not available | 2220.25.830.8250 | 2220.25.840.8250 | Not available | 2220.25.830.8250.P | 2220.25.840.8250.P |
| | Touch/DALI dim. | 46.5W | Not available | 2220.26.830.8250 | 2220.26.840.8250 | Not available | 2220.26.830.8250.P | 2220.26.840.8250.P |

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

* The luminous flux given on this page refers to module in 4000K - Ra80.
For exact specifications see table on page 262

Linear Modules: LEDLiner Down

Philips Fortimo LED Module 1100lm/ft*



Module availability:

- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed

| | | | 2700K - Ra90 Opal diffuser | 3000K - Ra80 Opal diffuser | 4000K - Ra80 Opal diffuser | 2700K - Ra90 Prismatic diffuser | 3000K - Ra80 Prismatic diffuser | 4000K - Ra80 Prismatic diffuser |
|--------------------------|-----------------|-------|-------------------------------|-------------------------------|-------------------------------|------------------------------------|------------------------------------|------------------------------------|
| 8800lm 2248mm | Non dimmable | 49.6W | 2220.24.927.8800 | 2220.24.830.8800 | 2220.24.840.8800 | 2220.24.927.8800.P | 2220.24.830.8800.P | 2220.24.840.8800.P |
| | 1-10V dimmable | 49.6W | 2220.25.927.8800 | 2220.25.830.8800 | 2220.25.840.8800 | 2220.25.927.8800.P | 2220.25.830.8800.P | 2220.25.840.8800.P |
| | Touch/DALI dim. | 49.6W | 2220.26.927.8800 | 2220.26.830.8800 | 2220.26.840.8800 | 2220.26.927.8800.P | 2220.26.830.8800.P | 2220.26.840.8800.P |
| 9350lm 2390mm | Non dimmable | 52.7W | Not available | 2220.24.830.9350 | 2220.24.840.9350 | Not available | 2220.24.830.9350.P | 2220.24.840.9350.P |
| | 1-10V dimmable | 52.7W | Not available | 2220.25.830.9350 | 2220.25.840.9350 | Not available | 2220.25.830.9350.P | 2220.25.840.9350.P |
| | Touch/DALI dim. | 52.7W | Not available | 2220.26.830.9350 | 2220.26.840.9350 | Not available | 2220.26.830.9350.P | 2220.26.840.9350.P |
| 9900lm 2530mm | Non dimmable | 55.8W | 2220.24.927.9900 | 2220.24.830.9900 | 2220.24.840.9900 | 2220.24.927.9900.P | 2220.24.830.9900.P | 2220.24.840.9900.P |
| | 1-10V dimmable | 55.8W | 2220.25.927.9900 | 2220.25.830.9900 | 2220.25.840.9900 | 2220.25.927.9900.P | 2220.25.830.9900.P | 2220.25.840.9900.P |
| | Touch/DALI dim. | 55.8W | 2220.26.927.9900 | 2220.26.830.9900 | 2220.26.840.9900 | 2220.26.927.9900.P | 2220.26.830.9900.P | 2220.26.840.9900.P |
| 10450lm 2672mm | Non dimmable | 58.9W | Not available | 2220.24.830.10450 | 2220.24.840.10450 | Not available | 2220.24.830.10450.P | 2220.24.840.10450.P |
| | 1-10V dimmable | 58.9W | Not available | 2220.25.830.10450 | 2220.25.840.10450 | Not available | 2220.25.830.10450.P | 2220.25.840.10450.P |
| | Touch/DALI dim. | 58.9W | Not available | 2220.26.830.10450 | 2220.26.840.10450 | Not available | 2220.26.830.10450.P | 2220.26.840.10450.P |
| 11000lm 2810mm | Non dimmable | 62W | 2220.24.927.11000 | 2220.24.830.11000 | 2220.24.840.11000 | 2220.24.927.11000.P | 2220.24.830.11000.P | 2220.24.840.11000.P |
| | 1-10V dimmable | 62W | 2220.25.927.11000 | 2220.25.830.11000 | 2220.25.840.11000 | 2220.25.927.11000.P | 2220.25.830.11000.P | 2220.25.840.11000.P |
| | Touch/DALI dim. | 62W | 2220.26.927.11000 | 2220.26.830.11000 | 2220.26.840.11000 | 2220.26.927.11000.P | 2220.26.830.11000.P | 2220.26.840.11000.P |
| 11550lm 2952mm | Non dimmable | 65.1W | Not available | 2220.24.830.11550 | 2220.24.840.11550 | Not available | 2220.24.830.11550.P | 2220.24.840.11550.P |
| | 1-10V dimmable | 65.1W | Not available | 2220.25.830.11550 | 2220.25.840.11550 | Not available | 2220.25.830.11550.P | 2220.25.840.11550.P |
| | Touch/DALI dim. | 65.1W | Not available | 2220.26.830.11550 | 2220.26.840.11550 | Not available | 2220.26.830.11550.P | 2220.26.840.11550.P |
| 12100lm 3092mm | Non dimmable | 68.2W | 2220.24.927.12100 | 2220.24.830.12100 | 2220.24.840.12100 | 2220.24.927.12100.P | 2220.24.830.12100.P | 2220.24.840.12100.P |
| | 1-10V dimmable | 68.2W | 2220.25.927.12100 | 2220.25.830.12100 | 2220.25.840.12100 | 2220.25.927.12100.P | 2220.25.830.12100.P | 2220.25.840.12100.P |
| | Touch/DALI dim. | 68.2W | 2220.26.927.12100 | 2220.26.830.12100 | 2220.26.840.12100 | 2220.26.927.12100.P | 2220.26.830.12100.P | 2220.26.840.12100.P |
| 12650lm 3234mm | Non dimmable | 71.3W | Not available | 2220.24.830.12650 | 2220.24.840.12650 | Not available | 2220.24.830.12650.P | 2220.24.840.12650.P |
| | 1-10V dimmable | 71.3W | Not available | 2220.25.830.12650 | 2220.25.840.12650 | Not available | 2220.25.830.12650.P | 2220.25.840.12650.P |
| | Touch/DALI dim. | 71.3W | Not available | 2220.26.830.12650 | 2220.26.840.12650 | Not available | 2220.26.830.12650.P | 2220.26.840.12650.P |
| 13200lm 3372mm | Non dimmable | 74.4W | 2220.24.927.13200 | 2220.24.830.13200 | 2220.24.840.13200 | 2220.24.927.13200.P | 2220.24.830.13200.P | 2220.24.840.13200.P |
| | 1-10V dimmable | 74.4W | 2220.25.927.13200 | 2220.25.830.13200 | 2220.25.840.13200 | 2220.25.927.13200.P | 2220.25.830.13200.P | 2220.25.840.13200.P |
| | Touch/DALI dim. | 74.4W | 2220.26.927.13200 | 2220.26.830.13200 | 2220.26.840.13200 | 2220.26.927.13200.P | 2220.26.830.13200.P | 2220.26.840.13200.P |

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170