


# LEDLiner65

## Recessed

Recessed aluminium extruded profile 65x52mm. Strong attention is given to thermal management (reduction of heat), equal light distribution and glare reduction (Prismatic Optics). LEDLiner65 Recessed offers the latest and best performing LED lighting technology using Philips LED Lines.

**Average weight of equipped profile:**  
3.30kg/m



### Possibilities

**Mounting:**

- Recessed

**Modules:**

- Linear LED modules - Down
- Juno Module
- Titan Module

**Options/Accessories**

- Prismatic cover (glare reduction)
- Emergency lighting (1Hr/3Hrs)
- Actilume daylight/presence sensor

5 Years **Philips** Warranty

### Index

**Custom made:**

Linear modules Down..... p.248


**Ready to go:**

Recessed..... p.171



Optional:  
IP65 Compound

More info on p.206

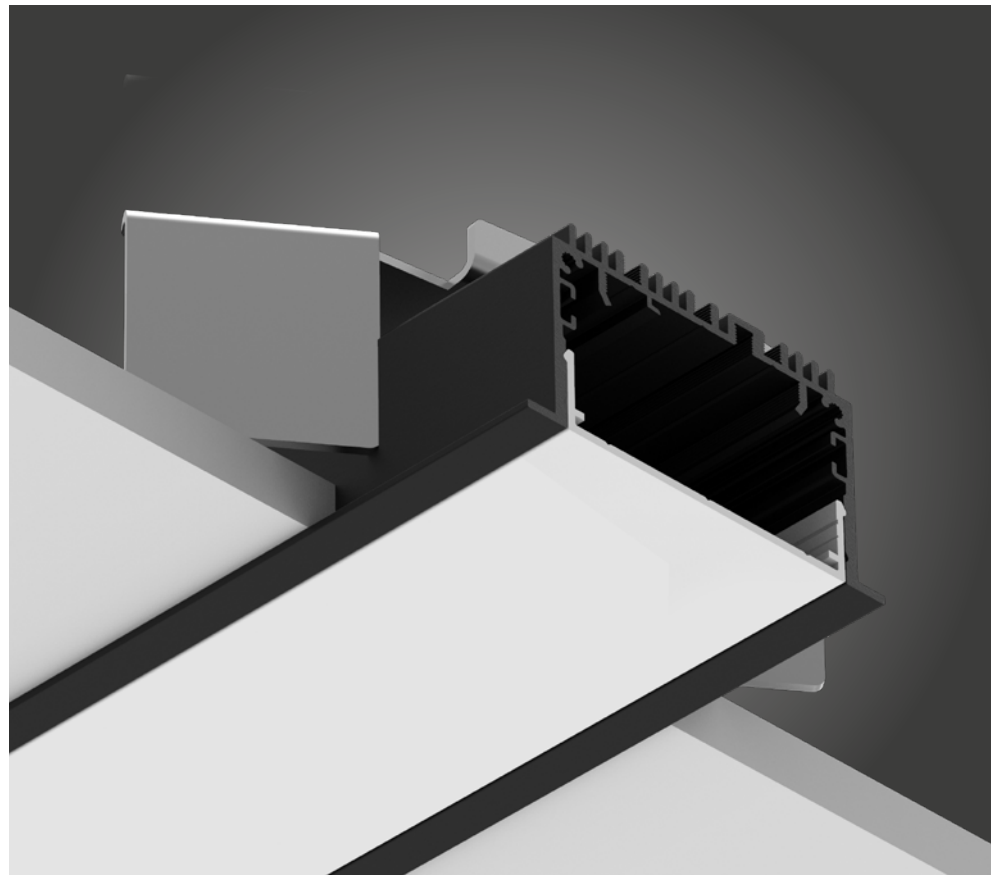

Available colors

01


White Matt Text.

18

Grey Matt Text.

03

Black Matt Text.




Available with opal or prismatic cover.

# Basic components

Profile housing




**Profile /meter (max. length single piece 3400mm)**  
 Matt White Texture 704.00.01  
 Matt Black Texture 704.00.03  
 Matt Grey 9006 Texture 704.00.18  
 Other RAL Colors 650.99.00 on request



**Connector**  
 90° 724.00.00  
 135° 732.00.00  
 180° 725.00.00  
 "T" 752.99.00  
 Custom made 723.00.00




**End cap (1 piece)**     **Standard**     **PC Out**  
 Matt White 706.00.01     710.00.01  
 Matt Black 706.00.03     710.00.03  
 Matt Grey 9006 706.00.18     710.00.18




**LEDLiner65 Cover**  
**Per meter**  
 Opal PC Cover 709.00.00  
 Prismatic PC cover 768.00.00  
 Matt White Texture 709.00.01  
 Matt Black Texture 709.00.03  
 Matt Grey 9006 Texture 709.00.18

Mounting



**Mounting Bracket**  
**Recessed Bracket** 707.00.00  
 0-1400mm: 2 brackets required  
 1401-2400mm: 3 brackets required  
 2401mm-3400mm: 4 brackets required

Linear Modules




**Linear Down**  
**Philips Fortimo LED Module 1100lm/ft**  
 See linear modules p.248-249

Available linear modules:  
 Ra80 - 3000K / 4000K  
 Ra90 - 2700K / 3000K / 4000K

# Optional modules

Electrical



**Extra circuit**  
**Per meter**  
 Extra circuit /m 650.00.00  
 When multiple modules are used in one profile, modules can be switched individually using multiple circuits. Length of extra circuit equals the full length of the profile.

Extra



**Emergency module for linear modules**  
 1Hr Standard 659.24.LED-1  
 3Hrs Standard 659.24.LED-3  
 1Hr DALI 659.26.LED-1  
 3Hrs DALI 659.26.LED-3  
 Emergency modules are equipped with self-testing. DALI version with on command testing, status read-out and additional functionality. More info see p.271



**Actilume daylight/presence detection**  
 Actilume system 659.00.00  
 1 sensor integrated in 1 fixture

# Spot modules

## Juno

Orientable spot module (driver included)



<b>44° Reflector</b>	2700K - 380lm	2212.24.927. <b>XX</b>
	Non dim 3000K - 400lm	2212.24.930. <b>XX</b>
	Ra90 4000K - 409lm	2212.24.940. <b>XX</b>



<b>Soft Beam</b>	2700K - 380lm	2213.24.927. <b>XX</b>
	Non dim 3000K - 400lm	2213.24.930. <b>XX</b>
	Ra90 4000K - 409lm	2213.24.940. <b>XX</b>

Module length



### Colors

Matt White Texture .....	<b>01</b>	standard
Matt Black Texture .....	<b>03</b>	standard
Matt Anthracite Texture .....	<b>07</b>	standard
Matt Grey 9006Texture.....	<b>18</b>	standard
Smoked Brown Texture .....	<b>25</b>	
Gold Matt .....	<b>16</b>	
Old Matt Copper .....	<b>24</b>	
Corten .....	<b>15</b>	
Other RAL colors on request		

## Titan

Orientable spot module (driver included)



<b>2700K</b>	Non dim.	<b>836lm - 8.9W</b>
	Ra90	2208.24.927. <b>AA.XX</b>

<b>3000K</b>	Non dim.	<b>867lm - 8.9W</b>
	Ra90	2208.24.930. <b>AA.XX</b>

<b>4000K</b>	Non dim.	<b>886lm - 8.9W</b>
	Ra90	2208.24.940. <b>AA.XX</b>

Module length



28° Reflector: 0000.00.000.**28.00**  
 40° Reflector: 0000.00.000.**40.00**


### Colors

Matt White Texture .....	<b>01</b>	standard
Matt Black Texture .....	<b>03</b>	standard
Matt Anthracite Texture .....	<b>07</b>	standard
Matt Grey 9006Texture.....	<b>18</b>	standard
Smoked Brown Texture .....	<b>25</b>	
Gold Matt .....	<b>16</b>	
Old Matt Copper .....	<b>24</b>	
Corten .....	<b>15</b>	
Other RAL colors on request		



# Linear Modules: LEDLiner Down

## Philips Fortimo LED Module 1100lm/ft\*



**Module availability:**

- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed


		2700K - Ra90 Opal diffuser		3000K - Ra80 Opal diffuser		4000K - Ra80 Opal diffuser		2700K - Ra90 Prismatic diffuser		3000K - Ra80 Prismatic diffuser		4000K - Ra80 Prismatic diffuser	
<b>3300lm</b> 844mm	Non dimmable	18.6W	2220.24.927.3300	2220.24.830.3300	2220.24.840.3300	2220.24.927.3300.P	2220.24.830.3300.P	2220.24.840.3300.P					
	1-10V dimmable	18.6W	2220.25.927.3300	2220.25.830.3300	2220.25.840.3300	2220.25.927.3300.P	2220.25.830.3300.P	2220.25.840.3300.P					
	Touch/DALI dim.	18.6W	2220.26.927.3300	2220.26.830.3300	2220.26.840.3300	2220.26.927.3300.P	2220.26.830.3300.P	2220.26.840.3300.P					
<b>3850lm</b> 986mm	Non dimmable	21.7W	Not available	2220.24.830.3850	2220.24.840.3850	Not available	2220.24.830.3850.P	2220.24.840.3850.P					
	1-10V dimmable	21.7W	Not available	2220.25.830.3850	2220.25.840.3850	Not available	2220.25.830.3850.P	2220.25.840.3850.P					
	Touch/DALI dim.	21.7W	Not available	2220.26.830.3850	2220.26.840.3850	Not available	2220.26.830.3850.P	2220.26.840.3850.P					
<b>4400lm</b> 1124mm	Non dimmable	24.8W	2220.24.927.4400	2220.24.830.4400	2220.24.840.4400	2220.24.927.4400.P	2220.24.830.4400.P	2220.24.840.4400.P					
	1-10V dimmable	24.8W	2220.25.927.4400	2220.25.830.4400	2220.25.840.4400	2220.25.927.4400.P	2220.25.830.4400.P	2220.25.840.4400.P					
	Touch/DALI dim.	24.8W	2220.26.927.4400	2220.26.830.4400	2220.26.840.4400	2220.26.927.4400.P	2220.26.830.4400.P	2220.26.840.4400.P					
<b>4950lm</b> 1266mm	Non dimmable	27.9W	Not available	2220.24.830.4950	2220.24.840.4950	Not available	2220.24.830.4950.P	2220.24.840.4950.P					
	1-10V dimmable	27.9W	Not available	2220.25.830.4950	2220.25.840.4950	Not available	2220.25.830.4950.P	2220.25.840.4950.P					
	Touch/DALI dim.	27.9W	Not available	2220.26.830.4950	2220.26.840.4950	Not available	2220.26.830.4950.P	2220.26.840.4950.P					
<b>5500lm</b> 1406mm	Non dimmable	31W	2220.24.927.5500	2220.24.830.5500	2220.24.840.5500	2220.24.927.5500.P	2220.24.830.5500.P	2220.24.840.5500.P					
	1-10V dimmable	31W	2220.25.927.5500	2220.25.830.5500	2220.25.840.5500	2220.25.927.5500.P	2220.25.830.5500.P	2220.25.840.5500.P					
	Touch/DALI dim.	31W	2220.26.927.5500	2220.26.830.5500	2220.26.840.5500	2220.26.927.5500.P	2220.26.830.5500.P	2220.26.840.5500.P					
<b>6050lm</b> 1548mm	Non dimmable	34.1W	Not available	2220.24.830.6050	2220.24.840.6050	Not available	2220.24.830.6050.P	2220.24.840.6050.P					
	1-10V dimmable	34.1W	Not available	2220.25.830.6050	2220.25.840.6050	Not available	2220.25.830.6050.P	2220.25.840.6050.P					
	Touch/DALI dim.	34.1W	Not available	2220.26.830.6050	2220.26.840.6050	Not available	2220.26.830.6050.P	2220.26.840.6050.P					
<b>6600lm</b> 1686mm	Non dimmable	37.2W	2220.24.927.6600	2220.24.830.6600	2220.24.840.6600	2220.24.927.6600.P	2220.24.830.6600.P	2220.24.840.6600.P					
	1-10V dimmable	37.2W	2220.25.927.6600	2220.25.830.6600	2220.25.840.6600	2220.25.927.6600.P	2220.25.830.6600.P	2220.25.840.6600.P					
	Touch/DALI dim.	37.2W	2220.26.927.6600	2220.26.830.6600	2220.26.840.6600	2220.26.927.6600.P	2220.26.830.6600.P	2220.26.840.6600.P					
<b>7150lm</b> 1828mm	Non dimmable	40.3W	Not available	2220.24.830.7150	2220.24.840.7150	Not available	2220.24.830.7150.P	2220.24.840.7150.P					
	1-10V dimmable	40.3W	Not available	2220.25.830.7150	2220.25.840.7150	Not available	2220.25.830.7150.P	2220.25.840.7150.P					
	Touch/DALI dim.	40.3W	Not available	2220.26.830.7150	2220.26.840.7150	Not available	2220.26.830.7150.P	2220.26.840.7150.P					
<b>7700lm</b> 1968mm	Non dimmable	43.4W	2220.24.927.7700	2220.24.830.7700	2220.24.840.7700	2220.24.927.7700.P	2220.24.830.7700.P	2220.24.840.7700.P					
	1-10V dimmable	43.4W	2220.25.927.7700	2220.25.830.7700	2220.25.840.7700	2220.25.927.7700.P	2220.25.830.7700.P	2220.25.840.7700.P					
	Touch/DALI dim.	43.4W	2220.26.927.7700	2220.26.830.7700	2220.26.840.7700	2220.26.927.7700.P	2220.26.830.7700.P	2220.26.840.7700.P					
<b>8250lm</b> 2110mm	Non dimmable	46.5W	Not available	2220.24.830.8250	2220.24.840.8250	Not available	2220.24.830.8250.P	2220.24.840.8250.P					
	1-10V dimmable	46.5W	Not available	2220.25.830.8250	2220.25.840.8250	Not available	2220.25.830.8250.P	2220.25.840.8250.P					
	Touch/DALI dim.	46.5W	Not available	2220.26.830.8250	2220.26.840.8250	Not available	2220.26.830.8250.P	2220.26.840.8250.P					

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

\* The luminous flux given on this page refers to module in 4000K - Ra80.  
For exact specifications see table on page 262

# Linear Modules: LEDLiner Down

## Philips Fortimo LED Module 1100lm/ft\*



Module availability:

- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed

			2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser	3000K - Ra80 Prismatic diffuser	4000K - Ra80 Prismatic diffuser
<b>8800lm</b> 2248mm	Non dimmable	49.6W	2220.24.927.8800	2220.24.830.8800	2220.24.840.8800	2220.24.927.8800.P	2220.24.830.8800.P	2220.24.840.8800.P
	1-10V dimmable	49.6W	2220.25.927.8800	2220.25.830.8800	2220.25.840.8800	2220.25.927.8800.P	2220.25.830.8800.P	2220.25.840.8800.P
	Touch/DALI dim.	49.6W	2220.26.927.8800	2220.26.830.8800	2220.26.840.8800	2220.26.927.8800.P	2220.26.830.8800.P	2220.26.840.8800.P
<b>9350lm</b> 2390mm	Non dimmable	52.7W	Not available	2220.24.830.9350	2220.24.840.9350	Not available	2220.24.830.9350.P	2220.24.840.9350.P
	1-10V dimmable	52.7W	Not available	2220.25.830.9350	2220.25.840.9350	Not available	2220.25.830.9350.P	2220.25.840.9350.P
	Touch/DALI dim.	52.7W	Not available	2220.26.830.9350	2220.26.840.9350	Not available	2220.26.830.9350.P	2220.26.840.9350.P
<b>9900lm</b> 2530mm	Non dimmable	55.8W	2220.24.927.9900	2220.24.830.9900	2220.24.840.9900	2220.24.927.9900.P	2220.24.830.9900.P	2220.24.840.9900.P
	1-10V dimmable	55.8W	2220.25.927.9900	2220.25.830.9900	2220.25.840.9900	2220.25.927.9900.P	2220.25.830.9900.P	2220.25.840.9900.P
	Touch/DALI dim.	55.8W	2220.26.927.9900	2220.26.830.9900	2220.26.840.9900	2220.26.927.9900.P	2220.26.830.9900.P	2220.26.840.9900.P
<b>10450lm</b> 2672mm	Non dimmable	58.9W	Not available	2220.24.830.10450	2220.24.840.10450	Not available	2220.24.830.10450.P	2220.24.840.10450.P
	1-10V dimmable	58.9W	Not available	2220.25.830.10450	2220.25.840.10450	Not available	2220.25.830.10450.P	2220.25.840.10450.P
	Touch/DALI dim.	58.9W	Not available	2220.26.830.10450	2220.26.840.10450	Not available	2220.26.830.10450.P	2220.26.840.10450.P
<b>11000lm</b> 2810mm	Non dimmable	62W	2220.24.927.11000	2220.24.830.11000	2220.24.840.11000	2220.24.927.11000.P	2220.24.830.11000.P	2220.24.840.11000.P
	1-10V dimmable	62W	2220.25.927.11000	2220.25.830.11000	2220.25.840.11000	2220.25.927.11000.P	2220.25.830.11000.P	2220.25.840.11000.P
	Touch/DALI dim.	62W	2220.26.927.11000	2220.26.830.11000	2220.26.840.11000	2220.26.927.11000.P	2220.26.830.11000.P	2220.26.840.11000.P
<b>11550lm</b> 2952mm	Non dimmable	65.1W	Not available	2220.24.830.11550	2220.24.840.11550	Not available	2220.24.830.11550.P	2220.24.840.11550.P
	1-10V dimmable	65.1W	Not available	2220.25.830.11550	2220.25.840.11550	Not available	2220.25.830.11550.P	2220.25.840.11550.P
	Touch/DALI dim.	65.1W	Not available	2220.26.830.11550	2220.26.840.11550	Not available	2220.26.830.11550.P	2220.26.840.11550.P
<b>12100lm</b> 3092mm	Non dimmable	68.2W	2220.24.927.12100	2220.24.830.12100	2220.24.840.12100	2220.24.927.12100.P	2220.24.830.12100.P	2220.24.840.12100.P
	1-10V dimmable	68.2W	2220.25.927.12100	2220.25.830.12100	2220.25.840.12100	2220.25.927.12100.P	2220.25.830.12100.P	2220.25.840.12100.P
	Touch/DALI dim.	68.2W	2220.26.927.12100	2220.26.830.12100	2220.26.840.12100	2220.26.927.12100.P	2220.26.830.12100.P	2220.26.840.12100.P
<b>12650lm</b> 3234mm	Non dimmable	71.3W	Not available	2220.24.830.12650	2220.24.840.12650	Not available	2220.24.830.12650.P	2220.24.840.12650.P
	1-10V dimmable	71.3W	Not available	2220.25.830.12650	2220.25.840.12650	Not available	2220.25.830.12650.P	2220.25.840.12650.P
	Touch/DALI dim.	71.3W	Not available	2220.26.830.12650	2220.26.840.12650	Not available	2220.26.830.12650.P	2220.26.840.12650.P
<b>13200lm</b> 3372mm	Non dimmable	74.4W	2220.24.927.13200	2220.24.830.13200	2220.24.840.13200	2220.24.927.13200.P	2220.24.830.13200.P	2220.24.840.13200.P
	1-10V dimmable	74.4W	2220.25.927.13200	2220.25.830.13200	2220.25.840.13200	2220.25.927.13200.P	2220.25.830.13200.P	2220.25.840.13200.P
	Touch/DALI dim.	74.4W	2220.26.927.13200	2220.26.830.13200	2220.26.840.13200	2220.26.927.13200.P	2220.26.830.13200.P	2220.26.840.13200.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170