


LEDLiner66

Suspended & Ceiling Mounted

Aluminium extruded profile 65x105 mm for ceiling or suspended mounting solutions. Strong attention is given to thermal management (reduction of heat). LEDLiner66 offers the latest and best performing LED lighting technology using Philips LED modules. These modules can be used as direct lighting or combined direct/indirect lighting.

Average weight of equipped profile:
3.50kg/m

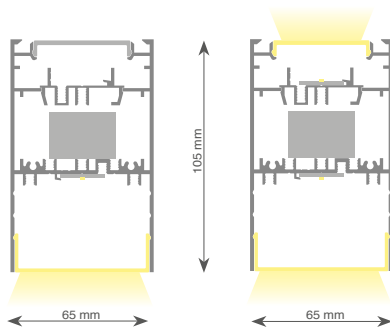

Possibilities

Mounting:

- Suspended
- Ceiling mounted

Modules:

- Linear LED modules - Down
- Linear LED modules - Up/Down
- Juno Module
- Titan Module

Options/Accessories

- Prismatic cover (glare reduction)
- Emergency lighting (1Hr/3Hrs)
- Actilume daylight/presence sensor

5 Years **Philips** Warranty


Index

Custom made:



- Linear modules Down.....p.248
- Linear modules Up & Down 1Cp.250
- Linear modules Up & Down 2Cp.252

Ready to go:

- Suspended.....p.216, 218, 219
- Ceiling Mounted.....p.217

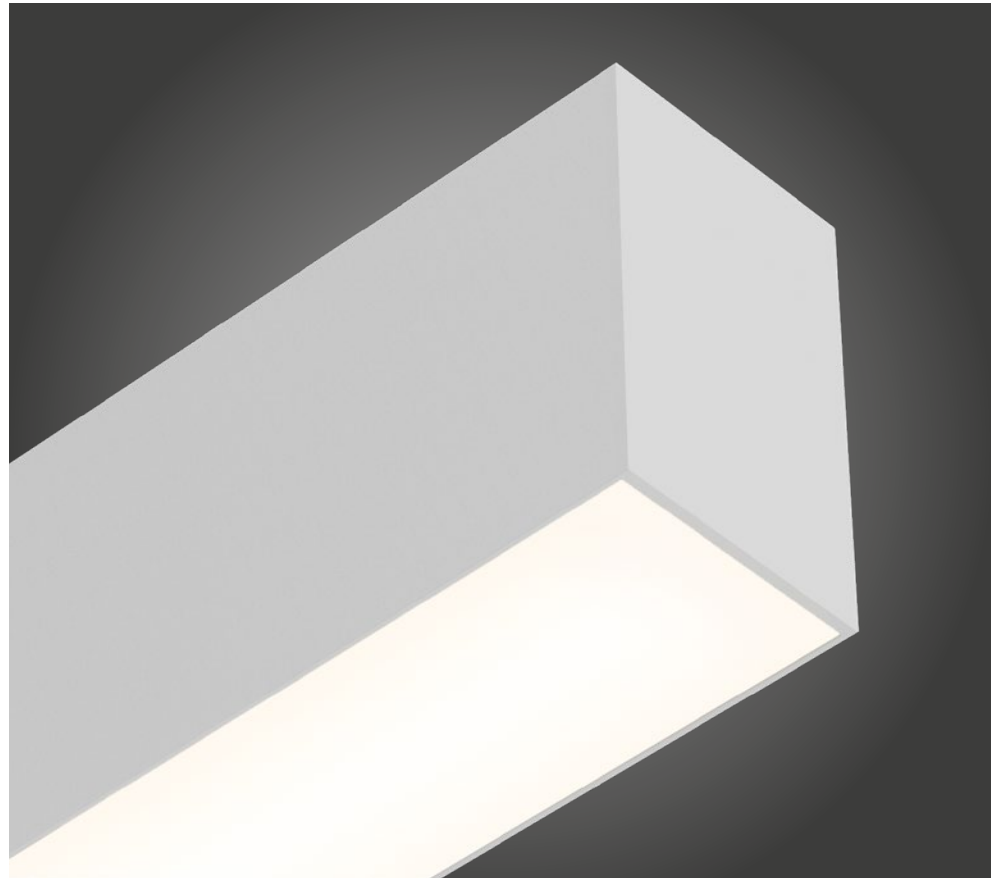


Available colors

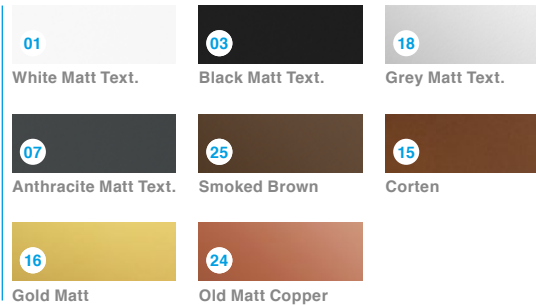

Available with opal or prismatic cover.

LEDLiner66 - Basic components

Profile housing



Profile /meter (max. length single piece 3400mm)

Matt White Texture	2103.00.01	
Matt Black Texture	2103.00.03	
Matt Anthracite Texture	2103.00.07	
Matt Grey 9006 Texture	2103.00.18	
Smoked Brown Texture	2103.00.25	
Gold Matt	2103.00.16	
Old Matt Copper	2103.00.24	
Corten	2103.00.15	
Other RAL Colors	650.99.00	on request



Connector 45/65/66

90°	2176.00.00
180°	2177.00.00
Custom made	2178.00.00



Screwless end cap (1 piece)

Matt White Texture	2173.00.01
Matt Black Texture	2173.00.03
Matt Anthracite Texture	2173.00.07
Matt Grey Texture	2173.00.18
Smoked Brown Texture	2173.00.25
Gold Matt	2173.00.16
Old Matt Copper	2173.00.24
Corten	2173.00.15

End caps require 15mm of space for each cap



LEDLiner65 Cover /meter

Opal cover	2202.00.00
Prismatic cover	2203.00.00
Matt White	2205.00.01
Matt Black	2205.00.03
Matt Anthracite	2205.00.07
Matt Grey 9006	2205.00.18
Smoked Brown Text.	2205.00.25
Gold Matt	2205.00.16
Old Matt Copper	2205.00.24
Corten	2205.00.15

Mounting




Suspension Set
Incl ceiling fixation, min suspension height: 75mm

2000mm	2162.00.00
4000mm	2169.00.00

0-1800mm: 2 suspensions required
1801mm-3400mm: 3 suspensions required
3401mm-4200mm: 4 suspensions required
4201mm-6700mm: 6 suspensions required
Bracket comes in the same color as the profile

Linear Modules




Linear Down / Up&Down
Philips Fortimo LED Module 1100lm/ft

Down p.248-249
Up&Down Single Circuit see p.250-251
Up&Down Double Circuit see p.252-253

Available linear modules:
Ra80 - 3000K / 4000K
Ra90 - 2700K / 3000K / 4000K

Electrical



Extra circuit
Per meter
Extra circuit /m 650.00.00

When multiple modules are used in one profile, modules can be switched individually using multiple circuits.
Length of extra circuit equals the full length of the profile.



Ceiling Connecting Box Square 67x67x40mm*


Matt White Texture	2150.00.01
Matt Black Texture	2150.00.03
Matt Anthracite Texture	2150.00.07
Matt Grey 9006 Texture	2150.00.18
Smoked Brown Texture	2150.00.25
Gold Matt	2150.00.16
Old Matt Copper	2150.00.24
Corten	2150.00.15



Recessed Connecting Box Ø80mm*

Matt White Texture	2152.00.01
Matt Black Texture	2152.00.03
Matt Grey 9006 Texture	2152.00.18

Cut-out: Ø68mm (depth min. 60mm)
Other Colors on request
Detailed view: see p.279



Trimless Connecting Box Ø80mm*

Matt White Texture	2153.00.01
Matt Black Texture	2153.00.03
Matt Grey 9006 Texture	2153.00.18

Cut-out: Ø85mm (depth min. 60mm)
Other Colors on request
Detailed view: see p.279




White Textile Cable Supply

3x0.75mm ² - 2000mm	2154.00.01
3x0.75mm ² - 4000mm	2155.00.01
5x0.75mm ² - 2000mm	2156.00.01
5x0.75mm ² - 4000mm	2157.00.01
7x0.75mm ² - 2000mm	2158.00.01
7x0.75mm ² - 4000mm	2159.00.01



Black Textile Cable Supply

3x0.75mm ² - 2000mm	2154.00.03
3x0.75mm ² - 4000mm	2155.00.03
5x0.75mm ² - 2000mm	2156.00.03
5x0.75mm ² - 4000mm	2157.00.03
7x0.75mm ² - 2000mm	2158.00.03
7x0.75mm ² - 4000mm	2159.00.03



Grey Textile Cable Supply

3x0.75mm ² - 2000mm	2154.00.18
3x0.75mm ² - 4000mm	2155.00.18
5x0.75mm ² - 2000mm	2156.00.18
5x0.75mm ² - 4000mm	2157.00.18
7x0.75mm ² - 2000mm	2158.00.18
7x0.75mm ² - 4000mm	2159.00.18

*Cable supply shown in photo not included

LEDLiner66 - Optional modules



Emergency module for linear modules
 1Hr Standard 659.24.LED-1
 3Hrs Standard 659.24.LED-3
 1Hr DALI 659.26.LED-1
 3Hrs DALI 659.26.LED-3
 Emergency modules are equipped with self-testing, DALI version with on command testing, status read-out and additional functionality.
 More info see p.271



Actilume daylight/presence detection
 Actilume system 659.00.00
 1 sensor integrated in 1 fixture

LEDLiner66 - Spot modules

Juno

Orientable spot module (driver included)



44° Reflector	2700K - 380lm	2212.24.927.XX
	Non dim 3000K - 400lm	2212.24.930.XX
	Ra90 4000K - 409lm	2212.24.940.XX



Soft Beam	2700K - 380lm	2213.24.927.XX
	Non dim 3000K - 400lm	2213.24.930.XX
	Ra90 4000K - 409lm	2213.24.940.XX

Module length



Colors

Matt White Texture	01	standard
Matt Black Texture	03	standard
Matt Anthracite Texture	07	standard
Matt Grey 9006Texture	18	standard
Smoked Brown Texture	25	standard
Gold Matt	16	
Old Matt Copper	24	
Corten	15	
Other RAL colors on request		

Titan

Orientable spot module (driver included)



2700K Ra90	Non dim.	836lm - 8.9W	2208.24.927.AA.XX
----------------------	----------	--------------	-------------------

3000K Ra90	Non dim.	867lm - 8.9W	2208.24.930.AA.XX
----------------------	----------	--------------	-------------------

4000K Ra90	Non dim.	886lm - 8.9W	2208.24.940.AA.XX
----------------------	----------	--------------	-------------------

28° Reflector: 0000.00.000.28.00
 40° Reflector: 0000.00.000.40.00

Module length




Colors

Matt White Texture	01	standard
Matt Black Texture	03	standard
Matt Anthracite Texture	07	standard
Matt Grey 9006Texture	18	standard
Smoked Brown Texture	25	standard
Gold Matt	16	
Old Matt Copper	24	
Corten	15	
Other RAL colors on request		



Linear Modules: LEDLiner Down

Philips Fortimo LED Module 1100lm/ft*



Module availability:

- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed


		2700K - Ra90 Opal diffuser		3000K - Ra80 Opal diffuser		4000K - Ra80 Opal diffuser		2700K - Ra90 Prismatic diffuser		3000K - Ra80 Prismatic diffuser		4000K - Ra80 Prismatic diffuser	
3300lm 844mm	Non dimmable	18.6W	2220.24.927.3300	2220.24.830.3300	2220.24.840.3300	2220.24.927.3300.P	2220.24.830.3300.P	2220.24.840.3300.P					
	1-10V dimmable	18.6W	2220.25.927.3300	2220.25.830.3300	2220.25.840.3300	2220.25.927.3300.P	2220.25.830.3300.P	2220.25.840.3300.P					
	Touch/DALI dim.	18.6W	2220.26.927.3300	2220.26.830.3300	2220.26.840.3300	2220.26.927.3300.P	2220.26.830.3300.P	2220.26.840.3300.P					
3850lm 986mm	Non dimmable	21.7W	Not available	2220.24.830.3850	2220.24.840.3850	Not available	2220.24.830.3850.P	2220.24.840.3850.P					
	1-10V dimmable	21.7W	Not available	2220.25.830.3850	2220.25.840.3850	Not available	2220.25.830.3850.P	2220.25.840.3850.P					
	Touch/DALI dim.	21.7W	Not available	2220.26.830.3850	2220.26.840.3850	Not available	2220.26.830.3850.P	2220.26.840.3850.P					
4400lm 1124mm	Non dimmable	24.8W	2220.24.927.4400	2220.24.830.4400	2220.24.840.4400	2220.24.927.4400.P	2220.24.830.4400.P	2220.24.840.4400.P					
	1-10V dimmable	24.8W	2220.25.927.4400	2220.25.830.4400	2220.25.840.4400	2220.25.927.4400.P	2220.25.830.4400.P	2220.25.840.4400.P					
	Touch/DALI dim.	24.8W	2220.26.927.4400	2220.26.830.4400	2220.26.840.4400	2220.26.927.4400.P	2220.26.830.4400.P	2220.26.840.4400.P					
4950lm 1266mm	Non dimmable	27.9W	Not available	2220.24.830.4950	2220.24.840.4950	Not available	2220.24.830.4950.P	2220.24.840.4950.P					
	1-10V dimmable	27.9W	Not available	2220.25.830.4950	2220.25.840.4950	Not available	2220.25.830.4950.P	2220.25.840.4950.P					
	Touch/DALI dim.	27.9W	Not available	2220.26.830.4950	2220.26.840.4950	Not available	2220.26.830.4950.P	2220.26.840.4950.P					
5500lm 1406mm	Non dimmable	31W	2220.24.927.5500	2220.24.830.5500	2220.24.840.5500	2220.24.927.5500.P	2220.24.830.5500.P	2220.24.840.5500.P					
	1-10V dimmable	31W	2220.25.927.5500	2220.25.830.5500	2220.25.840.5500	2220.25.927.5500.P	2220.25.830.5500.P	2220.25.840.5500.P					
	Touch/DALI dim.	31W	2220.26.927.5500	2220.26.830.5500	2220.26.840.5500	2220.26.927.5500.P	2220.26.830.5500.P	2220.26.840.5500.P					
6050lm 1548mm	Non dimmable	34.1W	Not available	2220.24.830.6050	2220.24.840.6050	Not available	2220.24.830.6050.P	2220.24.840.6050.P					
	1-10V dimmable	34.1W	Not available	2220.25.830.6050	2220.25.840.6050	Not available	2220.25.830.6050.P	2220.25.840.6050.P					
	Touch/DALI dim.	34.1W	Not available	2220.26.830.6050	2220.26.840.6050	Not available	2220.26.830.6050.P	2220.26.840.6050.P					
6600lm 1686mm	Non dimmable	37.2W	2220.24.927.6600	2220.24.830.6600	2220.24.840.6600	2220.24.927.6600.P	2220.24.830.6600.P	2220.24.840.6600.P					
	1-10V dimmable	37.2W	2220.25.927.6600	2220.25.830.6600	2220.25.840.6600	2220.25.927.6600.P	2220.25.830.6600.P	2220.25.840.6600.P					
	Touch/DALI dim.	37.2W	2220.26.927.6600	2220.26.830.6600	2220.26.840.6600	2220.26.927.6600.P	2220.26.830.6600.P	2220.26.840.6600.P					
7150lm 1828mm	Non dimmable	40.3W	Not available	2220.24.830.7150	2220.24.840.7150	Not available	2220.24.830.7150.P	2220.24.840.7150.P					
	1-10V dimmable	40.3W	Not available	2220.25.830.7150	2220.25.840.7150	Not available	2220.25.830.7150.P	2220.25.840.7150.P					
	Touch/DALI dim.	40.3W	Not available	2220.26.830.7150	2220.26.840.7150	Not available	2220.26.830.7150.P	2220.26.840.7150.P					
7700lm 1968mm	Non dimmable	43.4W	2220.24.927.7700	2220.24.830.7700	2220.24.840.7700	2220.24.927.7700.P	2220.24.830.7700.P	2220.24.840.7700.P					
	1-10V dimmable	43.4W	2220.25.927.7700	2220.25.830.7700	2220.25.840.7700	2220.25.927.7700.P	2220.25.830.7700.P	2220.25.840.7700.P					
	Touch/DALI dim.	43.4W	2220.26.927.7700	2220.26.830.7700	2220.26.840.7700	2220.26.927.7700.P	2220.26.830.7700.P	2220.26.840.7700.P					
8250lm 2110mm	Non dimmable	46.5W	Not available	2220.24.830.8250	2220.24.840.8250	Not available	2220.24.830.8250.P	2220.24.840.8250.P					
	1-10V dimmable	46.5W	Not available	2220.25.830.8250	2220.25.840.8250	Not available	2220.25.830.8250.P	2220.25.840.8250.P					
	Touch/DALI dim.	46.5W	Not available	2220.26.830.8250	2220.26.840.8250	Not available	2220.26.830.8250.P	2220.26.840.8250.P					

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

* The luminous flux given on this page refers to module in 4000K - Ra80.
For exact specifications see table on page 262

Linear Modules: LEDLiner Down

Philips Fortimo LED Module 1100lm/ft*



Module availability:


- LEDLiner35
- LEDLiner47
- LEDLiner65
- LEDLiner66
- LEDLiner85
- LEDLiner170
- LEDLiner40 Trimless
- LEDLiner40 Recessed
- LEDLiner45 Recessed
- LEDLiner65 Recessed
- LEDLiner100 Trimless
- LEDLiner100 Recessed

			2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser	3000K - Ra80 Prismatic diffuser	4000K - Ra80 Prismatic diffuser
8800lm 2248mm	Non dimmable	49.6W	2220.24.927.8800	2220.24.830.8800	2220.24.840.8800	2220.24.927.8800.P	2220.24.830.8800.P	2220.24.840.8800.P
	1-10V dimmable	49.6W	2220.25.927.8800	2220.25.830.8800	2220.25.840.8800	2220.25.927.8800.P	2220.25.830.8800.P	2220.25.840.8800.P
	Touch/DALI dim.	49.6W	2220.26.927.8800	2220.26.830.8800	2220.26.840.8800	2220.26.927.8800.P	2220.26.830.8800.P	2220.26.840.8800.P
9350lm 2390mm	Non dimmable	52.7W	Not available	2220.24.830.9350	2220.24.840.9350	Not available	2220.24.830.9350.P	2220.24.840.9350.P
	1-10V dimmable	52.7W	Not available	2220.25.830.9350	2220.25.840.9350	Not available	2220.25.830.9350.P	2220.25.840.9350.P
	Touch/DALI dim.	52.7W	Not available	2220.26.830.9350	2220.26.840.9350	Not available	2220.26.830.9350.P	2220.26.840.9350.P
9900lm 2530mm	Non dimmable	55.8W	2220.24.927.9900	2220.24.830.9900	2220.24.840.9900	2220.24.927.9900.P	2220.24.830.9900.P	2220.24.840.9900.P
	1-10V dimmable	55.8W	2220.25.927.9900	2220.25.830.9900	2220.25.840.9900	2220.25.927.9900.P	2220.25.830.9900.P	2220.25.840.9900.P
	Touch/DALI dim.	55.8W	2220.26.927.9900	2220.26.830.9900	2220.26.840.9900	2220.26.927.9900.P	2220.26.830.9900.P	2220.26.840.9900.P
10450lm 2672mm	Non dimmable	58.9W	Not available	2220.24.830.10450	2220.24.840.10450	Not available	2220.24.830.10450.P	2220.24.840.10450.P
	1-10V dimmable	58.9W	Not available	2220.25.830.10450	2220.25.840.10450	Not available	2220.25.830.10450.P	2220.25.840.10450.P
	Touch/DALI dim.	58.9W	Not available	2220.26.830.10450	2220.26.840.10450	Not available	2220.26.830.10450.P	2220.26.840.10450.P
11000lm 2810mm	Non dimmable	62W	2220.24.927.11000	2220.24.830.11000	2220.24.840.11000	2220.24.927.11000.P	2220.24.830.11000.P	2220.24.840.11000.P
	1-10V dimmable	62W	2220.25.927.11000	2220.25.830.11000	2220.25.840.11000	2220.25.927.11000.P	2220.25.830.11000.P	2220.25.840.11000.P
	Touch/DALI dim.	62W	2220.26.927.11000	2220.26.830.11000	2220.26.840.11000	2220.26.927.11000.P	2220.26.830.11000.P	2220.26.840.11000.P
11550lm 2952mm	Non dimmable	65.1W	Not available	2220.24.830.11550	2220.24.840.11550	Not available	2220.24.830.11550.P	2220.24.840.11550.P
	1-10V dimmable	65.1W	Not available	2220.25.830.11550	2220.25.840.11550	Not available	2220.25.830.11550.P	2220.25.840.11550.P
	Touch/DALI dim.	65.1W	Not available	2220.26.830.11550	2220.26.840.11550	Not available	2220.26.830.11550.P	2220.26.840.11550.P
12100lm 3092mm	Non dimmable	68.2W	2220.24.927.12100	2220.24.830.12100	2220.24.840.12100	2220.24.927.12100.P	2220.24.830.12100.P	2220.24.840.12100.P
	1-10V dimmable	68.2W	2220.25.927.12100	2220.25.830.12100	2220.25.840.12100	2220.25.927.12100.P	2220.25.830.12100.P	2220.25.840.12100.P
	Touch/DALI dim.	68.2W	2220.26.927.12100	2220.26.830.12100	2220.26.840.12100	2220.26.927.12100.P	2220.26.830.12100.P	2220.26.840.12100.P
12650lm 3234mm	Non dimmable	71.3W	Not available	2220.24.830.12650	2220.24.840.12650	Not available	2220.24.830.12650.P	2220.24.840.12650.P
	1-10V dimmable	71.3W	Not available	2220.25.830.12650	2220.25.840.12650	Not available	2220.25.830.12650.P	2220.25.840.12650.P
	Touch/DALI dim.	71.3W	Not available	2220.26.830.12650	2220.26.840.12650	Not available	2220.26.830.12650.P	2220.26.840.12650.P
13200lm 3372mm	Non dimmable	74.4W	2220.24.927.13200	2220.24.830.13200	2220.24.840.13200	2220.24.927.13200.P	2220.24.830.13200.P	2220.24.840.13200.P
	1-10V dimmable	74.4W	2220.25.927.13200	2220.25.830.13200	2220.25.840.13200	2220.25.927.13200.P	2220.25.830.13200.P	2220.25.840.13200.P
	Touch/DALI dim.	74.4W	2220.26.927.13200	2220.26.830.13200	2220.26.840.13200	2220.26.927.13200.P	2220.26.830.13200.P	2220.26.840.13200.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

Linear Modules: LEDLiner Up/Down - Single Circuit

Philips Fortimo LED Module 1100lm/ft*




Module availability: -LEDLiner47
-LEDLiner66
-LEDLiner85
-LEDLiner170

	Dimming	Power	2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser*	3000K - Ra80 Prismatic diffuser*	4000K - Ra80 Prismatic diffuser*
2x2200lm 562mm	Non dimmable	24.8W	2221.24.927.4400	2221.24.830.4400	2221.24.840.4400	2221.24.927.4400.P	2221.24.830.4400.P	2221.24.840.4400.P
	1-10V dimmable	24.8W	2221.25.927.4400	2221.25.830.4400	2221.25.840.4400	2221.25.927.4400.P	2221.25.830.4400.P	2221.25.840.4400.P
	Touch/DALI dim.	24.8W	2221.26.927.4400	2221.26.830.4400	2221.26.840.4400	2221.26.927.4400.P	2221.26.830.4400.P	2221.26.840.4400.P
2x2750lm 704mm	Non dimmable	31W	Not available	2221.24.830.5500	2221.24.840.5500	Not available	2221.24.830.5500.P	2221.24.840.5500.P
	1-10V dimmable	31W	Not available	2221.25.830.5500	2221.25.840.5500	Not available	2221.25.830.5500.P	2221.25.840.5500.P
	Touch/DALI dim.	31W	Not available	2221.26.830.5500	2221.26.840.5500	Not available	2221.26.830.5500.P	2221.26.840.5500.P
2x3300lm 844mm	Non dimmable	37.2W	2221.24.927.6600	2221.24.830.6600	2221.24.840.6600	2221.24.927.6600.P	2221.24.830.6600.P	2221.24.840.6600.P
	1-10V dimmable	37.2W	2221.25.927.6600	2221.25.830.6600	2221.25.840.6600	2221.25.927.6600.P	2221.25.830.6600.P	2221.25.840.6600.P
	Touch/DALI dim.	37.2W	2221.26.927.6600	2221.26.830.6600	2221.26.840.6600	2221.26.927.6600.P	2221.26.830.6600.P	2221.26.840.6600.P
2x3850lm 986mm	Non dimmable	43.4W	Not available	2221.24.830.7700	2221.24.840.7700	Not available	2221.24.830.7700.P	2221.24.840.7700.P
	1-10V dimmable	43.4W	Not available	2221.25.830.7700	2221.25.840.7700	Not available	2221.25.830.7700.P	2221.25.840.7700.P
	Touch/DALI dim.	43.4W	Not available	2221.26.830.7700	2221.26.840.7700	Not available	2221.26.830.7700.P	2221.26.840.7700.P
2x4400lm 1124mm	Non dimmable	49.6W	2221.24.927.8800	2221.24.830.8800	2221.24.840.8800	2221.24.927.8800.P	2221.24.830.8800.P	2221.24.840.8800.P
	1-10V dimmable	49.6W	2221.25.927.8800	2221.25.830.8800	2221.25.840.8800	2221.25.927.8800.P	2221.25.830.8800.P	2221.25.840.8800.P
	Touch/DALI dim.	49.6W	2221.26.927.8800	2221.26.830.8800	2221.26.840.8800	2221.26.927.8800.P	2221.26.830.8800.P	2221.26.840.8800.P
2x4950lm 1266mm	Non dimmable	55.8W	Not available	2221.24.830.9900	2221.24.840.9900	Not available	2221.24.830.9900.P	2221.24.840.9900.P
	1-10V dimmable	55.8W	Not available	2221.25.830.9900	2221.25.840.9900	Not available	2221.25.830.9900.P	2221.25.840.9900.P
	Touch/DALI dim.	55.8W	Not available	2221.26.830.9900	2221.26.840.9900	Not available	2221.26.830.9900.P	2221.26.840.9900.P
2x5500lm 1406mm	Non dimmable	62W	2221.24.927.11000	2221.24.830.11000	2221.24.840.11000	2221.24.927.11000.P	2221.24.830.11000.P	2221.24.840.11000.P
	1-10V dimmable	62W	2221.25.927.11000	2221.25.830.11000	2221.25.840.11000	2221.25.927.11000.P	2221.25.830.11000.P	2221.25.840.11000.P
	Touch/DALI dim.	62W	2221.26.927.11000	2221.26.830.11000	2221.26.840.11000	2221.26.927.11000.P	2221.26.830.11000.P	2221.26.840.11000.P
2x6050lm 1548mm	Non dimmable	68.2W	Not available	2221.24.830.12100	2221.24.840.12100	Not available	2221.24.830.12100.P	2221.24.840.12100.P
	1-10V dimmable	68.2W	Not available	2221.25.830.12100	2221.25.840.12100	Not available	2221.25.830.12100.P	2221.25.840.12100.P
	Touch/DALI dim.	68.2W	Not available	2221.26.830.12100	2221.26.840.12100	Not available	2221.26.830.12100.P	2221.26.840.12100.P
2x6600lm 1686mm	Non dimmable	74.4W	2221.24.927.13200	2221.24.830.13200	2221.24.840.13200	2221.24.927.13200.P	2221.24.830.13200.P	2221.24.840.13200.P
	1-10V dimmable	74.4W	2221.25.927.13200	2221.25.830.13200	2221.25.840.13200	2221.25.927.13200.P	2221.25.830.13200.P	2221.25.840.13200.P
	Touch/DALI dim.	74.4W	2221.26.927.13200	2221.26.830.13200	2221.26.840.13200	2221.26.927.13200.P	2221.26.830.13200.P	2221.26.840.13200.P
2x7150lm 1828mm	Non dimmable	80.6W	Not available	2221.24.830.14300	2221.24.840.14300	Not available	2221.24.830.14300.P	2221.24.840.14300.P
	1-10V dimmable	80.6W	Not available	2221.25.830.14300	2221.25.840.14300	Not available	2221.25.830.14300.P	2221.25.840.14300.P
	Touch/DALI dim.	80.6W	Not available	2221.26.830.14300	2221.26.840.14300	Not available	2221.26.830.14300.P	2221.26.840.14300.P
2x7700lm 1968mm	Non dimmable	86.8W	2221.24.927.15400	2221.24.830.15400	2221.24.840.15400	2221.24.927.15400.P	2221.24.830.15400.P	2221.24.840.15400.P
	1-10V dimmable	86.8W	2221.25.927.15400	2221.25.830.15400	2221.25.840.15400	2221.25.927.15400.P	2221.25.830.15400.P	2221.25.840.15400.P
	Touch/DALI dim.	86.8W	2221.26.927.15400	2221.26.830.15400	2221.26.840.15400	2221.26.927.15400.P	2221.26.830.15400.P	2221.26.840.15400.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

Linear Modules: LEDLiner Up/Down - Single Circuit

Philips Fortimo LED Module 1100lm/ft*




Module availability: -LEDLiner47
-LEDLiner66
-LEDLiner85
-LEDLiner170

		Power	2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser	3000K - Ra80 Prismatic diffuser	4000K - Ra80 Prismatic diffuser
2x8250lm 2110mm	Non dimmable	83W	Not available	2221.24.830.16500	2221.24.840.16500	Not available	2221.24.830.16500.P	2221.24.840.16500.P
	1-10V dimmable	83W	Not available	2221.25.830.16500	2221.25.840.16500	Not available	2221.25.830.16500.P	2221.25.840.16500.P
	Touch/DALI dim.	83W	Not available	2221.26.830.16500	2221.26.840.16500	Not available	2221.26.830.16500.P	2221.26.840.16500.P
2x8800lm 2248mm	Non dimmable	99.2W	2221.24.927.17600	2221.24.830.17600	2221.24.840.17600	2221.24.927.17600.P	2221.24.830.17600.P	2221.24.840.17600.P
	1-10V dimmable	99.2W	2221.25.927.17600	2221.25.830.17600	2221.25.840.17600	2221.25.927.17600.P	2221.25.830.17600.P	2221.25.840.17600.P
	Touch/DALI dim.	99.2W	2221.26.927.17600	2221.26.830.17600	2221.26.840.17600	2221.26.927.17600.P	2221.26.830.17600.P	2221.26.840.17600.P
2x9350lm 2390mm	Non dimmable	105.4W	Not available	2221.24.830.18700	2221.24.840.18700	Not available	2221.24.830.18700.P	2221.24.840.18700.P
	1-10V dimmable	105.4W	Not available	2221.25.830.18700	2221.25.840.18700	Not available	2221.25.830.18700.P	2221.25.840.18700.P
	Touch/DALI dim.	105.4W	Not available	2221.26.830.18700	2221.26.840.18700	Not available	2221.26.830.18700.P	2221.26.840.18700.P
2x9900lm 2530mm	Non dimmable	111.6W	2221.24.927.19800	2221.24.830.19800	2221.24.840.19800	2221.24.927.19800.P	2221.24.830.19800.P	2221.24.840.19800.P
	1-10V dimmable	111.6W	2221.25.927.19800	2221.25.830.19800	2221.25.840.19800	2221.25.927.19800.P	2221.25.830.19800.P	2221.25.840.19800.P
	Touch/DALI dim.	111.6W	2221.26.927.19800	2221.26.830.19800	2221.26.840.19800	2221.26.927.19800.P	2221.26.830.19800.P	2221.26.840.19800.P
2x10450lm 2672mm	Non dimmable	117.8W	Not available	2221.24.830.20900	2221.24.840.20900	Not available	2221.24.830.20900.P	2221.24.840.20900.P
	1-10V dimmable	117.8W	Not available	2221.25.830.20900	2221.25.840.20900	Not available	2221.25.830.20900.P	2221.25.840.20900.P
	Touch/DALI dim.	117.8W	Not available	2221.26.830.20900	2221.26.840.20900	Not available	2221.26.830.20900.P	2221.26.840.20900.P
2x11000lm 2810mm	Non dimmable	124W	2221.24.927.22000	2221.24.830.22000	2221.24.840.22000	2221.24.927.22000.P	2221.24.830.22000.P	2221.24.840.22000.P
	1-10V dimmable	124W	2221.25.927.22000	2221.25.830.22000	2221.25.840.22000	2221.25.927.22000.P	2221.25.830.22000.P	2221.25.840.22000.P
	Touch/DALI dim.	124W	2221.26.927.22000	2221.26.830.22000	2221.26.840.22000	2221.26.927.22000.P	2221.26.830.22000.P	2221.26.840.22000.P
2x11550lm 2952mm	Non dimmable	130.2W	Not available	2221.24.830.23100	2221.24.840.23100	Not available	2221.24.830.23100.P	2221.24.840.23100.P
	1-10V dimmable	130.2W	Not available	2221.25.830.23100	2221.25.840.23100	Not available	2221.25.830.23100.P	2221.25.840.23100.P
	Touch/DALI dim.	130.2W	Not available	2221.26.830.23100	2221.26.840.23100	Not available	2221.26.830.23100.P	2221.26.840.23100.P
2x12100lm 3092mm	Non dimmable	136.4W	2221.24.927.24200	2221.24.830.24200	2221.24.840.24200	2221.24.927.24200.P	2221.24.830.24200.P	2221.24.840.24200.P
	1-10V dimmable	136.4W	2221.25.927.24200	2221.25.830.24200	2221.25.840.24200	2221.25.927.24200.P	2221.25.830.24200.P	2221.25.840.24200.P
	Touch/DALI dim.	136.4W	2221.26.927.24200	2221.26.830.24200	2221.26.840.24200	2221.26.927.24200.P	2221.26.830.24200.P	2221.26.840.24200.P
2x12650lm 3234mm	Non dimmable	142.6W	Not available	2221.24.830.25300	2221.24.840.25300	Not available	2221.24.830.25300.P	2221.24.840.25300.P
	1-10V dimmable	142.6W	Not available	2221.25.830.25300	2221.25.840.25300	Not available	2221.25.830.25300.P	2221.25.840.25300.P
	Touch/DALI dim.	142.6W	Not available	2221.26.830.25300	2221.26.840.25300	Not available	2221.26.830.25300.P	2221.26.840.25300.P
2x13200lm 3372mm	Non dimmable	148.8W	2221.24.927.26400	2221.24.830.26400	2221.24.840.26400	2221.24.927.26400.P	2221.24.830.26400.P	2221.24.840.26400.P
	1-10V dimmable	148.8W	2221.25.927.26400	2221.25.830.26400	2221.25.840.26400	2221.25.927.26400.P	2221.25.830.26400.P	2221.25.840.26400.P
	Touch/DALI dim.	148.8W	2221.26.927.26400	2221.26.830.26400	2221.26.840.26400	2221.26.927.26400.P	2221.26.830.26400.P	2221.26.840.26400.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

Linear Modules: LEDLiner Up/Down - Double Circuit

Philips Fortimo LED Module 1100lm/ft* - Direct & indirect on separate circuits




Module availability: -LEDLiner47
-LEDLiner66
-LEDLiner85
-LEDLiner170

			2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser	3000K - Ra80 Prismatic diffuser	4000K - Ra80 Prismatic diffuser
2x3300lm 844mm	Non dimmable	37.2W	2222.24.927.6600	2222.24.830.6600	2222.24.840.6600	2222.24.927.6600.P	2222.24.830.6600.P	2222.24.840.6600.P
	1-10V dimmable	37.2W	2222.25.927.6600	2222.25.830.6600	2222.25.840.6600	2222.25.927.6600.P	2222.25.830.6600.P	2222.25.840.6600.P
	Touch/DALI dim.	37.2W	2222.26.927.6600	2222.26.830.6600	2222.26.840.6600	2222.26.927.6600.P	2222.26.830.6600.P	2222.26.840.6600.P
2x3850lm 986mm	Non dimmable	43.4W	Not available	2222.24.830.7700	2222.24.840.7700	Not available	2222.24.830.7700.P	2222.24.840.7700.P
	1-10V dimmable	43.4W	Not available	2222.25.830.7700	2222.25.840.7700	Not available	2222.25.830.7700.P	2222.25.840.7700.P
	Touch/DALI dim.	43.4W	Not available	2222.26.830.7700	2222.26.840.7700	Not available	2222.26.830.7700.P	2222.26.840.7700.P
2x4400lm 1124mm	Non dimmable	49.6W	2222.24.927.8800	2222.24.830.8800	2222.24.840.8800	2222.24.927.8800.P	2222.24.830.8800.P	2222.24.840.8800.P
	1-10V dimmable	49.6W	2222.25.927.8800	2222.25.830.8800	2222.25.840.8800	2222.25.927.8800.P	2222.25.830.8800.P	2222.25.840.8800.P
	Touch/DALI dim.	49.6W	2222.26.927.8800	2222.26.830.8800	2222.26.840.8800	2222.26.927.8800.P	2222.26.830.8800.P	2222.26.840.8800.P
2x4950lm 1266mm	Non dimmable	55.8W	Not available	2222.24.830.9900	2222.24.840.9900	Not available	2222.24.830.9900.P	2222.24.840.9900.P
	1-10V dimmable	55.8W	Not available	2222.25.830.9900	2222.25.840.9900	Not available	2222.25.830.9900.P	2222.25.840.9900.P
	Touch/DALI dim.	55.8W	Not available	2222.26.830.9900	2222.26.840.9900	Not available	2222.26.830.9900.P	2222.26.840.9900.P
2x5500lm 1406mm	Non dimmable	62W	2222.24.927.11000	2222.24.830.11000	2222.24.840.11000	2222.24.927.11000.P	2222.24.830.11000.P	2222.24.840.11000.P
	1-10V dimmable	62W	2222.25.927.11000	2222.25.830.11000	2222.25.840.11000	2222.25.927.11000.P	2222.25.830.11000.P	2222.25.840.11000.P
	Touch/DALI dim.	62W	2222.26.927.11000	2222.26.830.11000	2222.26.840.11000	2222.26.927.11000.P	2222.26.830.11000.P	2222.26.840.11000.P
2x6050lm 1548mm	Non dimmable	68.2W	Not available	2222.24.830.12100	2222.24.840.12100	Not available	2222.24.830.12100.P	2222.24.840.12100.P
	1-10V dimmable	68.2W	Not available	2222.25.830.12100	2222.25.840.12100	Not available	2222.25.830.12100.P	2222.25.840.12100.P
	Touch/DALI dim.	68.2W	Not available	2222.26.830.12100	2222.26.840.12100	Not available	2222.26.830.12100.P	2222.26.840.12100.P
2x6600lm 1686mm	Non dimmable	74.4W	2222.24.927.13200	2222.24.830.13200	2222.24.840.13200	2222.24.927.13200.P	2222.24.830.13200.P	2222.24.840.13200.P
	1-10V dimmable	74.4W	2222.25.927.13200	2222.25.830.13200	2222.25.840.13200	2222.25.927.13200.P	2222.25.830.13200.P	2222.25.840.13200.P
	Touch/DALI dim.	74.4W	2222.26.927.13200	2222.26.830.13200	2222.26.840.13200	2222.26.927.13200.P	2222.26.830.13200.P	2222.26.840.13200.P
2x7150lm 1828mm	Non dimmable	80.6W	Not available	2222.24.830.14300	2222.24.840.14300	Not available	2222.24.830.14300.P	2222.24.840.14300.P
	1-10V dimmable	80.6W	Not available	2222.25.830.14300	2222.25.840.14300	Not available	2222.25.830.14300.P	2222.25.840.14300.P
	Touch/DALI dim.	80.6W	Not available	2222.26.830.14300	2222.26.840.14300	Not available	2222.26.830.14300.P	2222.26.840.14300.P
2x7700lm 1968mm	Non dimmable	86.8W	2222.24.927.15400	2222.24.830.15400	2222.24.840.15400	2222.24.927.15400.P	2222.24.830.15400.P	2222.24.840.15400.P
	1-10V dimmable	86.8W	2222.25.927.15400	2222.25.830.15400	2222.25.840.15400	2222.25.927.15400.P	2222.25.830.15400.P	2222.25.840.15400.P
	Touch/DALI dim.	86.8W	2222.26.927.15400	2222.26.830.15400	2222.26.840.15400	2222.26.927.15400.P	2222.26.830.15400.P	2222.26.840.15400.P
2x8250lm 2110mm	Non dimmable	93W	Not available	2222.24.830.16500	2222.24.840.16500	Not available	2222.24.830.16500.P	2222.24.840.16500.P
	1-10V dimmable	93W	Not available	2222.25.830.16500	2222.25.840.16500	Not available	2222.25.830.16500.P	2222.25.840.16500.P
	Touch/DALI dim.	93W	Not available	2222.26.830.16500	2222.26.840.16500	Not available	2222.26.830.16500.P	2222.26.840.16500.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170

Linear Modules: LEDLiner Up/Down - Double Circuit

Philips Fortimo LED Module 1100lm/ft* - Direct & indirect on separate circuits



Module availability: -LEDLiner47
-LEDLiner66
-LEDLiner85
-LEDLiner170

			2700K - Ra90 Opal diffuser	3000K - Ra80 Opal diffuser	4000K - Ra80 Opal diffuser	2700K - Ra90 Prismatic diffuser	3000K - Ra80 Prismatic diffuser	4000K - Ra80 Prismatic diffuser
2x8800lm 2248mm	Non dimmable	99.2W	2222.24.927.17600	2222.24.830.17600	2222.24.840.17600	2222.24.927.17600.P	2222.24.830.17600.P	2222.24.840.17600.P
	1-10V dimmable	99.2W	2222.25.927.17600	2222.25.830.17600	2222.25.840.17600	2222.25.927.17600.P	2222.25.830.17600.P	2222.25.840.17600.P
	Touch/DALI dim.	99.2W	2222.26.927.17600	2222.26.830.17600	2222.26.840.17600	2222.26.927.17600.P	2222.26.830.17600.P	2222.26.840.17600.P
2x9350lm 2390mm	Non dimmable	105.4W	Not available	2222.24.830.18700	2222.24.840.18700	Not available	2222.24.830.18700.P	2222.24.840.18700.P
	1-10V dimmable	105.4W	Not available	2222.25.830.18700	2222.25.840.18700	Not available	2222.25.830.18700.P	2222.25.840.18700.P
	Touch/DALI dim.	105.4W	Not available	2222.26.830.18700	2222.26.840.18700	Not available	2222.26.830.18700.P	2222.26.840.18700.P
2x9900lm 2530mm	Non dimmable	111.6W	2222.24.927.19800	2222.24.830.19800	2222.24.840.19800	2222.24.927.19800.P	2222.24.830.19800.P	2222.24.840.19800.P
	1-10V dimmable	111.6W	2222.25.927.19800	2222.25.830.19800	2222.25.840.19800	2222.25.927.19800.P	2222.25.830.19800.P	2222.25.840.19800.P
	Touch/DALI dim.	111.6W	2222.26.927.19800	2222.26.830.19800	2222.26.840.19800	2222.26.927.19800.P	2222.26.830.19800.P	2222.26.840.19800.P
2x10450lm 2672mm	Non dimmable	117.8W	Not available	2222.24.830.20900	2222.24.840.20900	Not available	2222.24.830.20900.P	2222.24.840.20900.P
	1-10V dimmable	117.8W	Not available	2222.25.830.20900	2222.25.840.20900	Not available	2222.25.830.20900.P	2222.25.840.20900.P
	Touch/DALI dim.	117.8W	Not available	2222.26.830.20900	2222.26.840.20900	Not available	2222.26.830.20900.P	2222.26.840.20900.P
2x11000lm 2810mm	Non dimmable	124W	2222.24.927.22000	2222.24.830.22000	2222.24.840.22000	2222.24.927.22000.P	2222.24.830.22000.P	2222.24.840.22000.P
	1-10V dimmable	124W	2222.25.927.22000	2222.25.830.22000	2222.25.840.22000	2222.25.927.22000.P	2222.25.830.22000.P	2222.25.840.22000.P
	Touch/DALI dim.	124W	2222.26.927.22000	2222.26.830.22000	2222.26.840.22000	2222.26.927.22000.P	2222.26.830.22000.P	2222.26.840.22000.P
2x11550lm 2952mm	Non dimmable	130.2W	Not available	2222.24.830.23100	2222.24.840.23100	Not available	2222.24.830.23100.P	2222.24.840.23100.P
	1-10V dimmable	130.2W	Not available	2222.25.830.23100	2222.25.840.23100	Not available	2222.25.830.23100.P	2222.25.840.23100.P
	Touch/DALI dim.	130.2W	Not available	2222.26.830.23100	2222.26.840.23100	Not available	2222.26.830.23100.P	2222.26.840.23100.P
2x12100lm 3092mm	Non dimmable	136.4W	2222.24.927.24200	2222.24.830.24200	2222.24.840.24200	2222.24.927.24200.P	2222.24.830.24200.P	2222.24.840.24200.P
	1-10V dimmable	136.4W	2222.25.927.24200	2222.25.830.24200	2222.25.840.24200	2222.25.927.24200.P	2222.25.830.24200.P	2222.25.840.24200.P
	Touch/DALI dim.	136.4W	2222.26.927.24200	2222.26.830.24200	2222.26.840.24200	2222.26.927.24200.P	2222.26.830.24200.P	2222.26.840.24200.P
2x12650lm 3234mm	Non dimmable	142.6W	Not available	2222.24.830.25300	2222.24.840.25300	Not available	2222.24.830.25300.P	2222.24.840.25300.P
	1-10V dimmable	142.6W	Not available	2222.25.830.25300	2222.25.840.25300	Not available	2222.25.830.25300.P	2222.25.840.25300.P
	Touch/DALI dim.	142.6W	Not available	2222.26.830.25300	2222.26.840.25300	Not available	2222.26.830.25300.P	2222.26.840.25300.P
2x13200lm 3372mm	Non dimmable	148.8W	2222.24.927.26400	2222.24.830.26400	2222.24.840.26400	2222.24.927.26400.P	2222.24.830.26400.P	2222.24.840.26400.P
	1-10V dimmable	148.8W	2222.25.927.26400	2222.25.830.26400	2222.25.840.26400	2222.25.927.26400.P	2222.25.830.26400.P	2222.25.840.26400.P
	Touch/DALI dim.	148.8W	2222.26.927.26400	2222.26.830.26400	2222.26.840.26400	2222.26.927.26400.P	2222.26.830.26400.P	2222.26.840.26400.P

Only available for LEDLiner65, LEDLiner65 Recessed, LEDLiner66, LEDLiner85 and LEDLiner170