

# Tektus 60

## Linear

Type	Linear
Mounting	Suspended
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3

Warranty: see p.348

### Spots: Citizen CLU LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3

Luminous flux LED	2700K - Ra90: 1517lm (134lm/W)
	3000K - Ra90: 1577lm (140lm/W)
	4000K - Ra90: 1601lm (142lm/W)

Luminous Flux System	2700K - Ra90: 995lm (77lm/W)
	3000K - Ra90: 1035lm (80lm/W)
	4000K - Ra90: 1050lm (81lm/W)

Beam angle	23° / 36° / 48° / 57° / Zoom (25° - 46°)
LED Power	11.3W (excl. driver)
System Power	12.9W (incl. driver)

### Linear Module 1800mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 4020lm (168lm/W)	4020lm (168lm/W)
	3000K - Ra90: 4160lm (173lm/W)	4160lm (173lm/W)
	4000K - Ra90: 4400lm (183lm/W)	4400lm (183lm/W)
Power	Direct (down): 24.0W - Indirect (up): 24.0W (excl. driver)	

### Linear Module 2400mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 6030lm (168lm/W)	6030lm (168lm/W)
	3000K - Ra90: 6240lm (173lm/W)	6240lm (173lm/W)
	4000K - Ra90: 6600lm (183lm/W)	6600lm (183lm/W)
Power	Direct (down): 36.0W - Indirect (up): 36.0W (excl. driver)	




- Driver:**
- integrated in luminaire
  - included in article number and price

#### Connection:

- Non dim: 5-wire cable (L1, N, PE, L2, L3). Up, down and spots on separately switchable circuits with common N. If only 3 wires are available, L1, L2 and L3 can be connected together. Separate switching will not be possible.
- DALI: 5-wire cable (L, N, PE, DA1, DA2). Up, down and spots on three separate DALI channels.
- Touch dimmable ON REQUEST (L,N, PE, Touch L1, Touch L2, Touch L3) Up, down and spots on separate circuits with common N.

Data sheets and wiring guide: see website

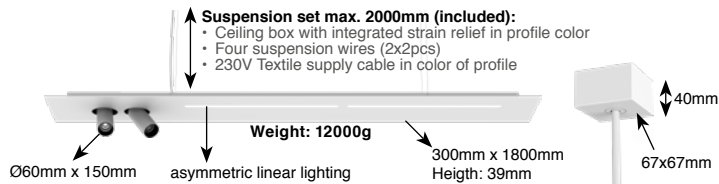

**Standard included**  
Dimensions:  
67x67x40mm (LxWxH)




**On request**  
Trimless connecting box  
Dimensions: Ø80  
(more info on p.346)



**On request**  
Recessed connecting box  
Dimensions: Ø80  
(more info on p.346)


On Request

Surface mounted version available

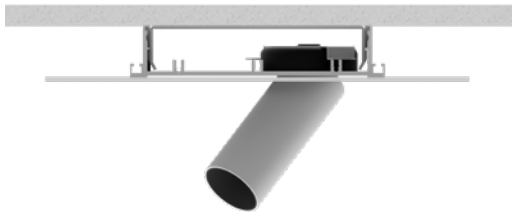


Optional zoom lens (Tektus 60 only):

Beam angle can be adjusted by rotating the frontring

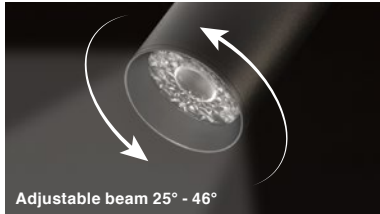

Adjustable beam 25° - 46°

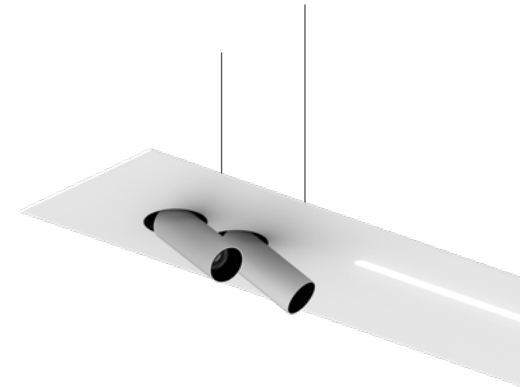

## Tektus 60 Linear 1800mm

2-Way

PRICES INCL. DRIVERS

Linear Module Down 4400lm + 2xTektus 60 Module		
2700K - Ra90 - Non dimmable	1604.AA.24.927.XX	€ 1027.00
2700K - Ra90 - DALI dim.	1604.AA.26.927.XX	€ 1059.00
3000K - Ra90 - Non dimmable	1604.AA.24.930.XX	€ 1027.00
3000K - Ra90 - DALI dim.	1604.AA.26.930.XX	€ 1059.00
4000K - Ra90 - Non dimmable	1604.AA.24.940.XX	€ 1027.00
4000K - Ra90 - DALI dim.	1604.AA.26.940.XX	€ 1059.00

Linear Module Up&Down 2x4400lm + 2xTektus 60 Module		
2700K - Ra90 - Non dimmable	1605.AA.24.927.XX	€ 1267.00
2700K - Ra90 - DALI dim.	1605.AA.26.927.XX	€ 1321.00
3000K - Ra90 - Non dimmable	1605.AA.24.930.XX	€ 1267.00
3000K - Ra90 - DALI dim.	1605.AA.26.930.XX	€ 1321.00
4000K - Ra90 - Non dimmable	1605.AA.24.940.XX	€ 1267.00
4000K - Ra90 - DALI dim.	1605.AA.26.940.XX	€ 1321.00

Zoom Lens: 0000.ZM.00.000.00 (+€140)

23° Lens: 0000.23.00.000.00

36° Lens: 0000.36.00.000.00

48° Lens: 0000.48.00.000.00

57° Lens: 0000.57.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request

01




White Matt Text.  
Standard

05



White + Black  
Standard

12



White + Gold Matt  
+ € 50.00

03



Black Matt Text.  
Standard

11



Black + Gold Matt  
+ € 50.00



