

Tektus Spotless

Linear


Type	Linear
Mounting	Suspended
Material	Aluminium
Adjustable	No
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Warranty:	see p.348

Linear Module 1440mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 8040lm (168lm/W) 3000K - Ra90: 8320lm (173lm/W) 4000K - Ra90: 8800lm (183lm/W)	2010lm (168lm/W) 2080lm (173lm/W) 2200lm (183lm/W)
Power	Direct (down): 48.0W - Indirect (up): 12.0W (excl. driver)	

Linear Module 2040mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 12060lm (168lm/W) 3000K - Ra90: 12480lm (173lm/W) 4000K - Ra90: 13200lm (183lm/W)	4020lm (168lm/W) 4160lm (173lm/W) 4400lm (183lm/W)
Power	Direct (down): 72.0W - Indirect (up): 24.0W (excl. driver)	

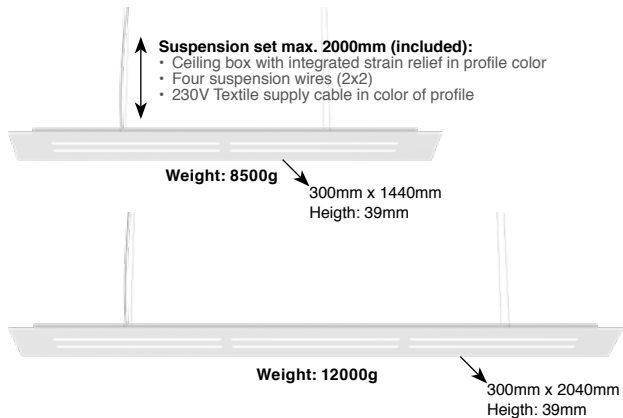

Driver:
- Integrated in luminaire
- included in article number and price

Connection:
- Non dim: 5-wire cable (L1, N, PE, L2, N2). Up and down on separately switchable electrical circuits.
If only 3 wires are available, L1&L1 and N1&N2 can be connected together. Seperate switching will not be possible.
- DALI: 7-wire cable (L, N, PE, DA1, DA1, DA2, DA2). Up and down on two separate DALI channels.
- Touch: 7-wire cable (L, N, PE, Touch L1, Touch N1, Touch L2, Touch N2). Up and down on two separate Touch circuits.

Data sheets and wiring guide: see website



Standard included
Dimensions:
67x67x40mm (LxWxH)




On request
Trimless connecting box
Dimensions: Ø80
(more info on p.346)



On request
Recessed connecting box
Dimensions: Ø80
(more info on p.346)

On Request
Surface mounted version available

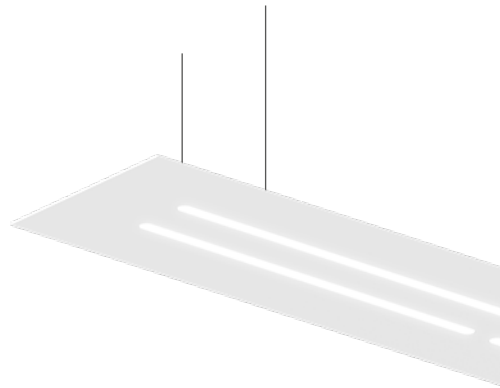

Tektus Linear Spotless

1440mm

PRICES INCL. DRIVERS

Linear Module Down 8800lm


2700K - Ra90 - Non dimmable	1612.00.24.927.XX
2700K - Ra90 - Touch & DALI dim.	1612.00.26.927.XX
3000K - Ra90 - Non dimmable	1612.00.24.930.XX
3000K - Ra90 - Touch & DALI dim.	1612.00.26.930.XX
4000K - Ra90 - Non dimmable	1612.00.24.940.XX
4000K - Ra90 - Touch & DALI dim.	1612.00.26.940.XX

Linear Module Down 8800lm + Linear Module Up 2200lm

2700K - Ra90 - Non dimmable	1609.00.24.927.XX
2700K - Ra90 - Touch & DALI dim.	1609.00.26.927.XX
3000K - Ra90 - Non dimmable	1609.00.24.930.XX
3000K - Ra90 - Touch & DALI dim.	1609.00.26.930.XX
4000K - Ra90 - Non dimmable	1609.00.24.940.XX
4000K - Ra90 - Touch & DALI dim.	1609.00.26.940.XX

On Request

Surface mounted version available

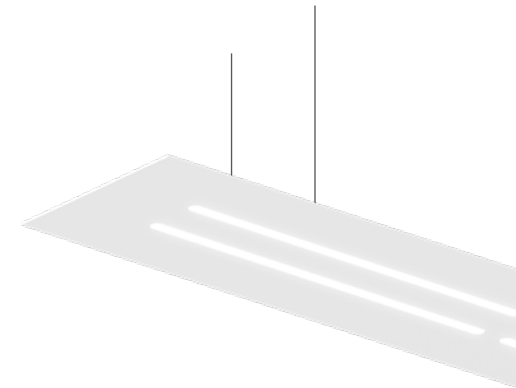

Tektus Linear Spotless

2040mm

PRICES INCL. DRIVERS

Linear Module Down 13200lm

2700K - Ra90 - Non dimmable	1610.00.24.927.XX
2700K - Ra90 - Touch & DALI dim.	1610.00.26.927.XX
3000K - Ra90 - Non dimmable	1610.00.24.930.XX
3000K - Ra90 - Touch & DALI dim.	1610.00.26.930.XX
4000K - Ra90 - Non dimmable	1610.00.24.940.XX
4000K - Ra90 - Touch & DALI dim.	1610.00.26.940.XX

Linear Module Down 13200lm + Linear Module Up 4400lm

2700K - Ra90 - Non dimmable	1611.00.24.927.XX
2700K - Ra90 - Touch & DALI dim.	1611.00.26.927.XX
3000K - Ra90 - Non dimmable	1611.00.24.930.XX
3000K - Ra90 - Touch & DALI dim.	1611.00.26.930.XX
4000K - Ra90 - Non dimmable	1611.00.24.940.XX
4000K - Ra90 - Touch & DALI dim.	1611.00.26.940.XX

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



18



03





